

# IFP-6503 65-INCH 4K INTERACTIVE FLAT PANEL DISPLAY


## FEATURES



- 4K UHD 3840 x 2160 resolution
- IPS Panel technology offers high color accuracy and wide viewing angles
- Incorporates IR touch technology
- 20-point simultaneous multi-touch capability
- Two styluses for simultaneous annotation with two colors
- Android OS 9.0 platform
- Windows 11 ready - plug and play support for Windows 7/8/10/11
- User-friendly Meetboard Whiteboard App for collaborative meetings
- The Screen-sharing App for multi-display control and wireless mirroring
- View, edit & create – office documents with WPS Office Suite App
- Files sharing via email, QR Code, Cloud Drives, Samba and FTP portals
- A USB Type-C port for digital signal, data and 65W power delivery
- Built-in speakers and audio mini-jack in/out connections
- Wall mounts and the Wi-Fi module are included for quick installation
- An optional FMC-06 mobile cart allows easy movement and accessory assembly

Meetboard IFP-Series interactive display offers a future-proof all-in-one collaborative hub for various settings, such as classrooms, meeting rooms and coworking spaces. Built on the Android OS platform, Meetboard is ideal for getting meetings and presentations going right away, without the need for additional devices or software. Present, brainstorming and taking notes cannot be more effortless on Meetboard, bringing a neat and organized space.

## TECHNICAL DRAWING

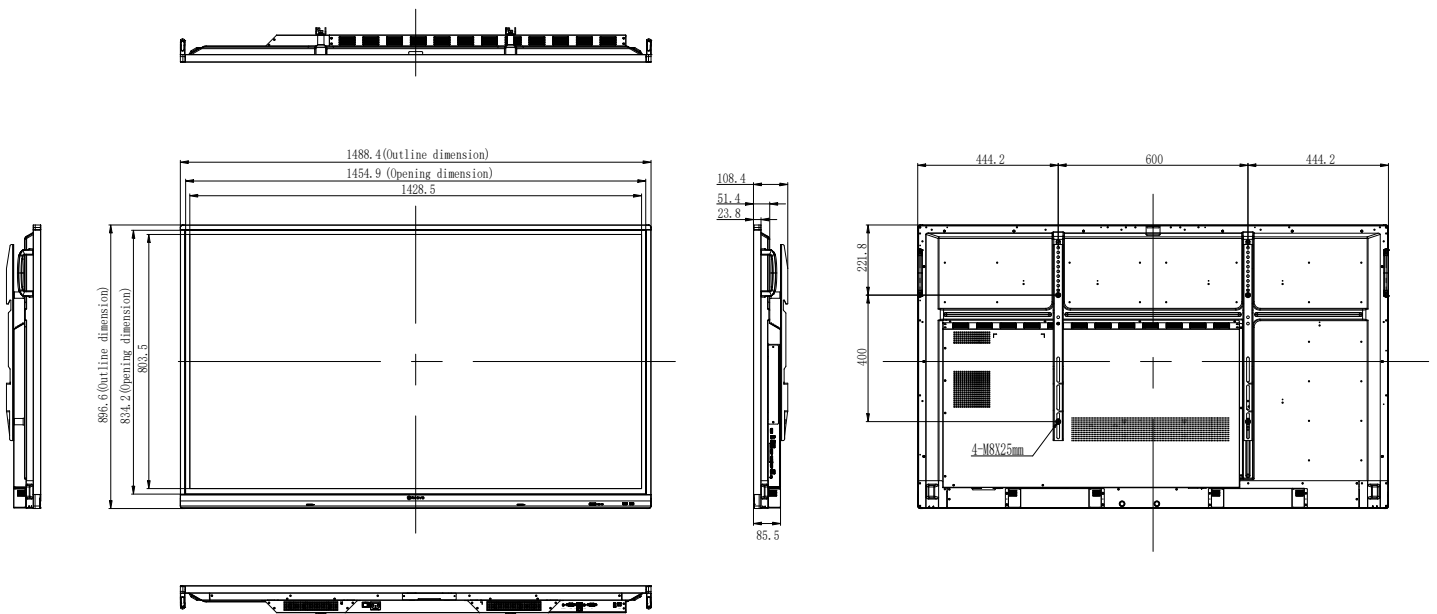

## SPECIFICATIONS

<b>Panel</b>	
Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	64.5"
Max. Resolution	UHD 3840 x 2160
Pixel Pitch	0.373 mm
Brightness	400 cd/m <sup>2</sup>
Contrast Ratio	1200 : 1
Viewing Angle (H/V)	178°/178°
Display Colour	1.07B
Response Time	5 ms
Surface Treatment	Haze 25%, 3H, Anti-glare treatment
<b>Frequency</b>	
Frequency (H)	30 kHz-80 kHz
Frequency (V)	50 Hz-76 Hz
<b>Signal Input</b>	
HDMI	2.0 x 3
VGA	15-Pin D-Sub x 1
<b>Signal Output</b>	
HDMI	2.0 x 1
<b>External Control</b>	
RS232 In	9-Pin D-Sub
LAN	RJ45 x 2
<b>Embedded Player</b>	
OS	Android 9.0
CPU	Dual core A73
Memory	4G
Storage	32G
<b>Other Connectivity</b>	
USB	2.0 x 1 / 3.0 x 4 / Type-C (DP 1.4 / Data 3.0 / PD:65W)
OPS Slot	Yes
<b>Audio</b>	
Audio In	Stereo Audio Jack (3.5 mm)
Audio Out	Stereo Audio Jack (3.5 mm), S/PDIF
Internal Speakers	16W x 2
<b>Touch Screen</b>	
Technology	Infrared Touch Frame
Positional Accuracy	±1.0 mm
Panel Interface	USB 2.0 x 2 (Type-B)
Single Touch Plug & Play	Windows 2000/XP/Vista/CE 6.0 macOS
Multi-touch Plug & Play	Windows 7/8/10/11 Android/Linux (kernel version 3.5+) Chrome OS (39 or above)
Multi-touch Support by Driver	macOS (supported by UPDD driver)
<b>Power</b>	
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	175W
Standby Mode	< 0.5W
Off Mode	0W
Power Supply	Internal
<b>Glass</b>	
Thickness	3.2 mm (0.13")
Transmission Rate	≥ 88%
Hardness	≥ 8H
Gloss	75±5 GU
<b>Operating Conditions</b>	
Temperature	0°C-40°C (32°F-104°F)
Humidity	10%-90% (non-condensing)
<b>Storage Conditions</b>	
Temperature	-20°C-60°C (-4°F-140°F)
Humidity	10%-90% (non-condensing)
<b>Mounting</b>	
VESA FPMPMI	Yes (600 x 400 mm)
<b>Dimensions</b>	
Product with Bracket (W x H x D)	1488.4 x 896.6 x 108.4 mm (58.6" x35.3" x4.3")
Product w/o Bracket (W x H x D)	1488.4 x 896.6 x 85.5 mm (58.6" x35.3" x3.4")
Packaging (W x H x D)	1628.0 x 1050.0 x 208.0 mm (64.1" x41.3" x8.2")
<b>Weight</b>	
Product w/o Base	36.0 kg (79.4 lb)
Product with Base	37.5 kg (82.7 lb)
Packaging	49.5 kg (109.1 lb)
<b>Regulation Approval</b>	
Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, UKCA, EAC, FCC, BSMI, ICES-003 (Issue 7)
<b>Accessories</b>	
Supplied	Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module
<b>Optional Accessories</b>	
Ceiling Mount (Landscape only)	CMP-01+LMK-01
Wall Mount (Landscape only)	LMK-01, LMK-03, LMA-02
Floor Mount (Landscape only)	FMC-03+LMK-04, FMC-04+LMK-04, FMC-05B, FWL-01B, FMC-06



All specifications are subject to change without prior notice.  
All rights reserved. The name AG Neovo is a trademark of AIC.  
All other trademarks are the property of their respective owners.  
P/C: IF6530 Version 1.0, 20220316