

# XND-6081VZ/8081VZ

2MP/5MP Network Dome Camera




## Key Features

- Max. 2Megapixel & 5Megapixel resolution
- 0.015Lux@F1.4 (Color), 0.0015Lux@F1.4 (B/W) (XND-6081VZ)  
0.07Lux@F1.4 (Color), 0.007Lux@F1.4 (B/W) (XND-8081VZ)
- Day & Night (ICR), WDR (150dB / 120dB)
- Modular structure and motorized PTRZ
- Hallway View, WiseStreamII Support
- Video & audio analytics, Audio playback
- DIS and shock detection with built-in gyro sensor
- IP52/IK10, PoE, 12VDC

## Dimensions

Unit : mm (inch)

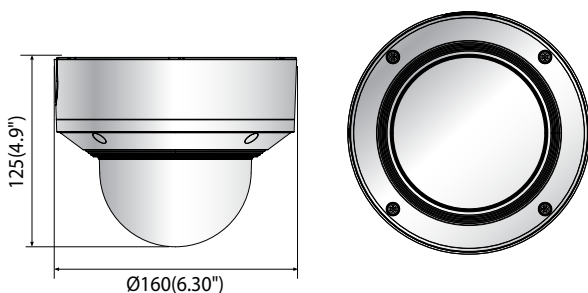

## Accessories (Optional)



SBC-160B



SBC-160B

	XND-6081VZ	XND-8081VZ
<b>VIDEO</b>		
Imaging Device	1/2.8" 2MP CMOS	1/1.8" 6MP CMOS
Effective Pixels	1945(H) x 1097(V)	2616(H) x 1976(V)
Min. Illumination	Color : 0.015Lux (F1.4, 1/30sec) BW : 0.0015Lux (F1.4, 1/30sec)	Color : 0.07Lux (F1.2, 1/30sec) BW : 0.007Lux (F1.2, 1/30sec)
Video Out	USB : Micro USB type B, 1280x720 for installation	
<b>LENS</b>		
Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal	3.6~9.4mm(2.6x) motorized varifocal
Max. Aperture Ratio	F1.4(Wide) ~ F3.6(Tele)	F1.2(Wide) ~ F2.4(Tele)
Angular Field of View	H : 119.5°(Wide)~27.9°(Tele) V : 62.8°(Wide)~15.7°(Tele) D : 142.1°(Wide)~32.0°(Tele)	H : 102.5°(Wide)~38.7°(Tele) V : 74.2°(Wide)~29.0°(Tele) D : 135.5°(Wide)~48.6°(Tele)
Min. Object Distance	0.5m(1.64ft)	
Focus Control	Simple focus	
Lens Type	DC auto iris, P iris	
<b>PAN / TILT / ROTATE</b>		
Pan / Tilt / Rotate Range	Remote adjustment (Max. 200cycles) ±175° / 0~85° / ±175°	
<b>OPERATIONAL</b>		
Camera Title	Displayed up to 85 characters	
Day & Night	Auto(ICR)	
Backlight Compensation	BLC, HLC, WDR, SDDR	
Wide Dynamic Range	150dB	120dB
Digital Noise Reduction	SSNR V	
Digital Image Stabilization	Support	
Defog	Support	
Motion Detection	8ea, 8point polygonal zones	
Privacy Masking	32ea, polygonal zones - Color : Grey/Green/Red/Blue/Black/White - Mosaic	
Gain Control	Low / Middle / High	
White Balance	ATW / AWC / Manual / Indoor / Outdoor	
LDC	Support	
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)	
Digital PTZ	Support (Preset, Group)	
Video Rotation	Flip, Mirror, Hallway view (90°/270°)	
Analytics	Defocus detection, Directional detection, Fog detection, Face detection, Motion detection, Digital auto tracking, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Sound classification, Shock detection	
Business Intelligence	People counting, Queue management, Heatmap	
Alarm I / O	Input 1ea / Output 1ea	
Alarm Triggers	Analytics, Network disconnect, Alarm input	
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover Audio playback	
Audio In	Selectable (mic in/line in/built-in mic), Supply voltage : 2.5VDC (4mA), Input impedance : 2K Ohm	
Audio Out	Line out, Max.output level : 1Vrms	
<b>NETWORK</b>		
Ethernet	RJ-45 (10/100BASE-T)	
Video Compression	H.265/H.264 : Main / Baseline / High, MJPEG	

	<b>XND-6081VZ</b>	<b>XND-8081VZ</b>
<b>Resolution</b>	1920 x 1080, 1280 x 1024, 1280 x 960, 1280x720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x 240	2560 x 1920, 2560 x 1440, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960, 1280 x 720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x 240
<b>Max. Framerate</b>	H.265/H.264 : Max. 60fps/50fps (60Hz/50Hz) MJPEG : Max. 30fps/25fps (60Hz/50Hz)	H.265/H.264: Max. 30fps/25fps (60Hz/50Hz) MJPEG: Max. 30fps/25fps (60Hz/50Hz)
<b>Smart Codec</b>	Manual (5ea area), WiseStream II	
<b>Video Quality Adjustment</b>	H.264/H.265 : Target bitrate level control MJPEG : Target bitrate level control	
<b>Bitrate Control</b>	H.264/H.265 : CBR or VBR MJPEG : VBR	
<b>Streaming</b>	Unicast (20 users) / Multicast Multiple streaming (Up to 10 profiles)	
<b>Audio Compression</b>	G.711 u-law / G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz	
<b>Protocol</b>	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP	
<b>Security</b>	HTTPS (SSL) login authentication Digest login authentication IP address filtering User access log 802.1X authentication (EAP-TLS, EAP-LEAP)	
<b>Edge Storage</b>	Micro SD/SDHC/SDXC 2slot 512GB	
<b>Application Programming Interface</b>	ONVIF Profile S/G/T SUNAPI (HTTP API) Wisenet open platform	
<b>Webpage Language</b>	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek	
<b>Web Viewer</b>	Supported OS : Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser : Google Chrome Supported Browser : MS Explorer11, MS Edge, Mozilla Firefox (Windows 64bit only), Apple Safari (Mac OS X only)	
<b>Memory</b>	1024MB RAM, 256MB Flash	
<b>ENVIRONMENTAL</b>		
<b>Operating Temperature / Humidity</b>	-25°C ~ +60°C (-13°F ~ +140°F) / Less than 90% RH	
<b>Storage Temperature / Humidity</b>	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH	
<b>Certification</b>	IP52/IK10	
<b>ELECTRICAL</b>		
<b>Input Voltage</b>	PoE (IEEE802.3af, Class3), 12VDC	
<b>Power Consumption</b>	PoE : Max. 10W, typical 4.8W 12VDC : Max. 8.5W, typical 3.71W	PoE : Max 11W, typical 5.4W 12VDC : Max 9W, typical 3.75W
<b>MECHANICAL</b>		
<b>Color / Material</b>	White / Aluminium	
<b>RAL Code</b>	RAL9003	
<b>Product dimensions / weight</b>	Ø160x125mm (Ø6.30x4.9") / 1.45kg (3.2lb)	
<b>Conduit hole</b>	1/2"	3/4"
<b>Hanging mount( Dome)</b>	SBP-160HM, SBP-160HMW	
<b>Skin cover (Dome)</b>	SBC-160B	

\* The latest product information / specification can be found at [hanwha-security.co.uk](http://hanwha-security.co.uk)

\* Design and specifications are subject to change without notice.

\* Wisenet is the proprietary brand of **Hanwha Techwin**.