

DS-2CE76U0T-LMF 4K Smart Hybrid Light Indoor Fixed Turret Camera



- High quality imaging with 4K, 3840 × 2160 resolution
- 2.8 mm and 3.6 mm fixed focal lens
- Up to 30 m IR distance for bright night imaging
- Up to 20 m white light distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)
- Smart-Hybrid light, optimize your security with flexible lighting options

▪ Specification

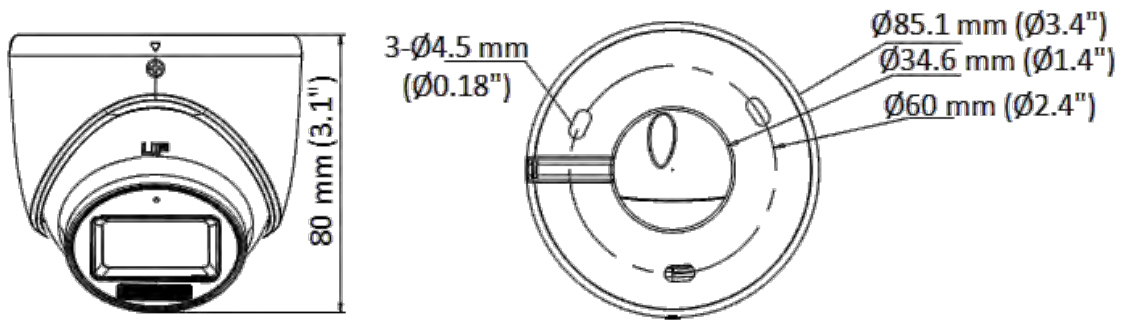
| Camera | |
|--------------------------|---|
| Image Sensor | 4K CMOS |
| Max. Resolution | 3840 (H) × 2160 (V) |
| Min. Illumination | 0.01 Lux @ (F1.6, AGC ON), 0 Lux with IR |
| Shutter Time | PAL: 1/12.5 s to 1/50, 000 s NTSC: 1/15 s to 1/50, 000 s |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0 to 360°, Tilt: 0 to 75°, Rotation: 0 to 360° |
| Signal System | PAL/NTSC |
| Lens | |
| Lens Type | 2.8 mm and 3.6 mm fixed focal lens |
| Focal Length & FOV | 2.8 mm, horizontal FOV: 108°, vertical FOV: 59°, diagonal FOV: 127° 3.6 mm, horizontal FOV: 88°, vertical FOV: 44°, diagonal FOV: 105° |
| Lens Mount | M12 |
| Illuminator | |
| Supplement Light Type | White Light,IR |
| Supplement Light Range | IR : Up to 30 m White Light : Up to 20 m |
| Image | |
| Image Settings | Brightness, Sharpness, Smart IR |
| Frame Rate | TVI: 8 MP @12.5 fps, 8 MP @15 fps, 4 MP @25 fps, 4 MP @30fps, 2 MP @25 fps, 2 MP @30 fps AHD: 8MP@15fps CVI: 8MP@12.5fps, 8MP@15fps CVBS: PAL/NTSC |
| Day/Night Mode | Auto/Color/BW (Black and White) |
| Wide Dynamic Range (WDR) | Digital WDR |
| Image Enhancement | DWDR/BLC/HLC/Global |
| White Balance | Auto/Manual |
| AGC | Yes |
| Interface | |
| Video Output | Switchable TVI/AHD/CVI/CVBS |
| General | |
| Power | 12 VDC ± 25%, 0.38 A, max. 4.6 W,*You are recommended to use one power adapter to supply the power for one camera. |
| Material | Metal |
| Dimension | 80 mm × Ø85.1 mm (3.1" × Ø3.4") |
| Weight | Approx. 310 g (0.68 lb.) |
| Operating Condition | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation) |
| Communication | HIKVISION-C |
| Language | English |
| Approval | |
| Protection | IP67 |

▪ **Available Model**

DS-2CE76U0T-LMF(2.8mm)









DS-2CE76U0T-LMF(3.6mm)

▪ **Dimension**



▪ **Accessory**

▪ **Optional**

| DS-1272ZJ-110-TRS Wall mount | DS-1275ZJ-SUS Vertical pole mount | DS-1276ZJ-SUS Corner mount | DS-1280ZJ-XS Junction box |
|---|---|--|---|
|  |  |  |  |
|  |  |  |  |



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

