


# PTZ Housings/Mounts

						
		<b>SHP-3701H</b>	<b>SHP-3701F</b>	<b>SHD-3000F1</b>	<b>SHD-3000F2</b>	<b>SHD-3000F3</b>
Operating Temperature		-50°C ~ +50°C (-58°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)	-10°C ~ +50°C (+14°F ~ +122°F)
Operating Humidity		0 ~ 90% RH	0 ~ 90% RH	0 ~ 90% RH	0 ~ 90% RH	0 ~ 90% RH
Materials	Body	Aluminum + Poly carbonate	Poly carbonate	Poly carbonate	Poly carbonate	Poly carbonate
	Bubble	Poly carbonate	Poly carbonate	N/A	N/A	N/A
Ingress Protection		IP66	N/A	N/A	N/A	N/A
Vandal Resistance		IK10	N/A	N/A	N/A	N/A
Dimensions (WxHxD)	External	Ø250.0 x 319.0mm (Ø9.84" x 12.56")	Ø254.0 x 276.4mm (Ø10" x 10.88")	Ø224.0 x 106.9mm (Ø8.82" x 4.21")	Ø194.0 x 102.2mm (Ø7.64" x 4.02")	Ø224.0 x 106.9mm (Ø8.82" x 4.21")
	Internal	Ø195.0 x 230.0mm (Ø7.68" x 9.06")	Ø186.0 x 242.0mm (Ø7.32" x 9.53") (145 at Housing)	N/A	N/A	N/A
Weight		2.9Kg (6.39 lb)	830g (1.83 lb)	490g (1.08 lb)	350g (0.77 lb)	490g (1.08 lb)
Input Voltage		24V AC	N/A	N/A	N/A	N/A
Power Consumption		Max. 50W	N/A	N/A	N/A	N/A
Color		Ivory	Ivory	Ivory	Ivory	Ivory
Applicable Model		SCP-3430/3371/3370 SCP-3250/2430/2373 SCP-2371/2370/2330 SCP-2273/2271/2270/2250 SNP-6321/6320/6201/6200 SNP-5430/5321/5300/5200 SNP-3371/3302	SCP-3430/3371/3370 SCP-3250/2430/2373 SCP-2371/2370/2330 SCP-2273/2271/2270/2250 SNP-6321/6320/6201/6200 SNP-5430/5321/5300/5200 SNP-3371/3302	SCD-6081R, SCV-6081R SND-7084R/7084 SND-6084R/6084/6083 SND-5084R/5084/5083 SNV-7084R/7084 SNV-6084R/6084 SNV-5084	SND-L6083R/L5083R SCD-5080/5082/5083/5083R	SNV-L6083R/L5083R SCV-5082/5083/5083R/5085


\* The latest product information / specification can be found at [www.samsungsecurity.com](http://www.samsungsecurity.com)

## Dimensions


Unit : mm (inch)

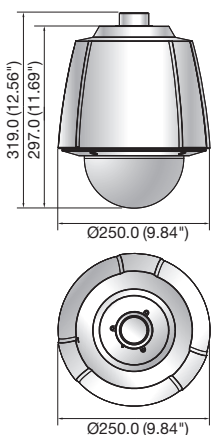


SHP-3701H

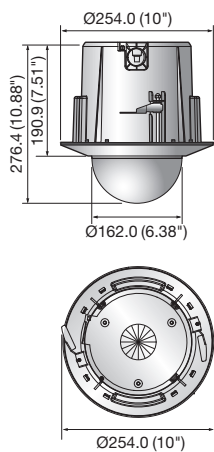

SHP-3701F



SHD-3000F1/3000F3



SHD-3000F2