



SPA-W100W

IP Wall Speaker



Key Features

- Output Level: +6dBV \pm 3dB
- Frequency Response: 20Hz ~ 20kHz
- Amplifier: Built in 10W Class D
- Power: PoE (IEEE 802.3 af type 1 Class 3), PoE+(IEEE 802.3 at type 2 Class 4)
- Internal Memory: 1 GBytes
- Max. Sound Pressure Level: 99dB
- Frequency Range (-10dB): 120Hz~20kHz
- Sensitivity (1Watt): 90dB
- IP Code: IP45
- Supported Protocol: IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- TTS: English(US, UK), German, French, Spanish, Russian
- Audio Monitoring: Speaker, Connection test

SPA-W100W

IP Wall Speaker



Specifications

Product	
Type	IP Wall speaker
Line Output	
Output Level	+6dBV ± 3dB
Frequency Response	20Hz ~ 20kHz
THD + N Ratio (AES17 LPF)	Less than 0.1%
S/N Ratio (20kHz LPF, A-WTD)	Greater than 91dB
Amplifier	
Description	Built in 10W Class D
Network	
Ethernet	10/100 Base-T
Memory	
Internal Memory	1 GBytes
External Memory (Micro SD)	SDHC upto 32GB (SANDISK)
Contact	
Contact Input. Dry contact	One channel
Contact Output. Dry contact (NO)	One channel
General	
Operating Temperature	-20 ~ +50°C (-4°F ~ +122°F)
Operating Humidity	10~85% RH (Non-Condensing)
IP code	IP54
Weight	2.5Kg
Size	170(W)*250(H)*134(D)mm
Color	Black/White
Certificate	EMC : KS C 9832/9835, EN 55032/55035, FCC Part 15 Subpart B, ICES-003 Safety : KC 62368-1, UL 62368-1, CAN/CSA 62368-1
Power	
PoE	PoE (IEEE 802.3 af type 1 Class 3)
PoE+	PoE+(IEEE 802.3 at type 2 Class 4)
Embedded MIC	
Input Sensitivity	Sound Level Meter

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com

Hanwha Vision is formerly known as Hanwha Techwin.

Frequency Response
Sound Level Meter
Audio

Supported Audio Format	WAV, MP3 in mono/stereo from 64 kbps to 320 kbps. Sampling rate from 16 kHz up to 48 kHz
------------------------	---

Speaker

Speaker Component	2Way 5" LF Drive & 0.5" HF Driver. Passive type
-------------------	---

Max. Sound Pressure Level (PoE)	97dB
---------------------------------	------

Max. Sound Pressure Level (PoE+)	101dB
----------------------------------	-------

Frequency Range (-10dB)	120Hz~20kHz
-------------------------	-------------

Sensitivity (1Watt)	91dB
---------------------	------

Coverage Pattern	(HxV) : 180° X 120°(1kHz) / 120° X 70°(4kHz)
------------------	--

Network Protocol

Security	Password protection : admin,setup,user,guest (sha-2, Digest authentication, User access log) Digest authentication, User access log
----------	---

Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
---------------------	--

System Integration

API (Application Programming Interface)	SUNAPI
---	--------

Multi-source Dynamic PA control	Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH) Up to 256 Zone Control (Multicast) Up to 20 Zone Control (Unicast) Up to 255 Groups
---------------------------------	--

VoIP	Tested with SIP clients such as Grandstream, Yealink, Cisco, MicroSIP softphone and PBX supplier such as Asterisk Tested with SIP client such as Grandstream and PBX supplier such as Grandstream Supported SIP features: DTMF (RFC2833) Supported codecs: PCMU, PCMA, speex/8000, speex/16000
------	---

TTS	English(US, UK), German, French, Spanish, Russian
-----	---


Audio Monitoring	Speaker test by graphic level meter (Built in test tool)
------------------	--

Event & Preset	Virtual Contact, Dry contact
----------------	------------------------------

Functional Monitoring	Connection verification, Built-in system logging
-----------------------	--


SPA-W100W

IP Wall Speaker



CAD

Unit:mm [inch]

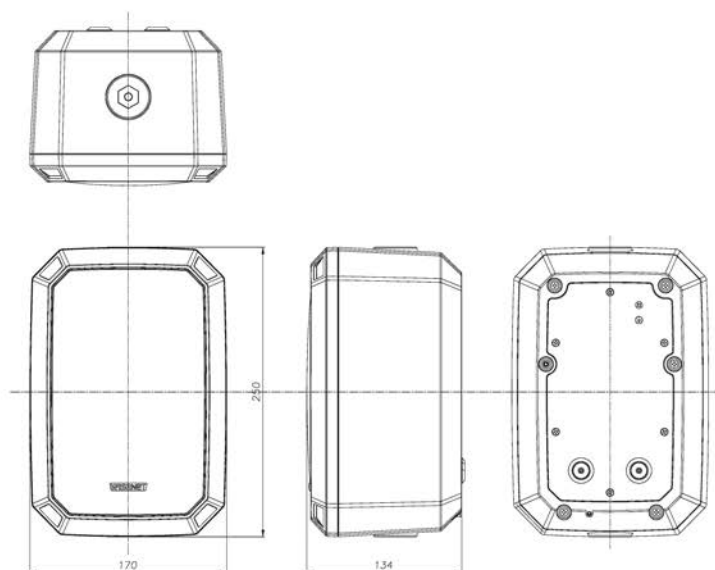

3	MODEL2	
2	MODEL1	
1	SPA-S1000	'22.7.15
No.	MODEL NAME	DATE
Unit:mm[inch]		SCALE:1/1
© Hanwha Techwin		

© Hanwha Techn Co.,Ltd. All rights reserved.