

DS-QAZ0206G1-S
6 W Ceiling Secondary Speaker




- Connecting the primary speaker for amplification.

▪ Specification

Speaker	
Rated Power	6 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	93 dB
Max. Acoustic Pressure	100 dB SPL
Direction	All directions
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Interface	
Audio In	Fixed resistance input $\times 1$, 8 Ω *The primary speaker(6 W, 8 Ω) can be connected to a maximum of 1 secondary speaker(6 W, 8 Ω).
General	
Operating Temperature	10 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$
Material	Device body: plastic; Mesh cover: metal
Dimension	$\varnothing 179$ mm \times 77.5 mm ($\varnothing 7.05$ " \times 3.05") (Hole Size: 160 mm)
Package Dimension	255 mm \times 243 mm \times 175 mm (10.04" \times 9.57" \times 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Packing List	Device $\times 1$ Mesh cover $\times 1$ Regulatory Compliance and Safety Information $\times 1$
Operating Humidity	< 90% (No condensation)


▪ Wiring

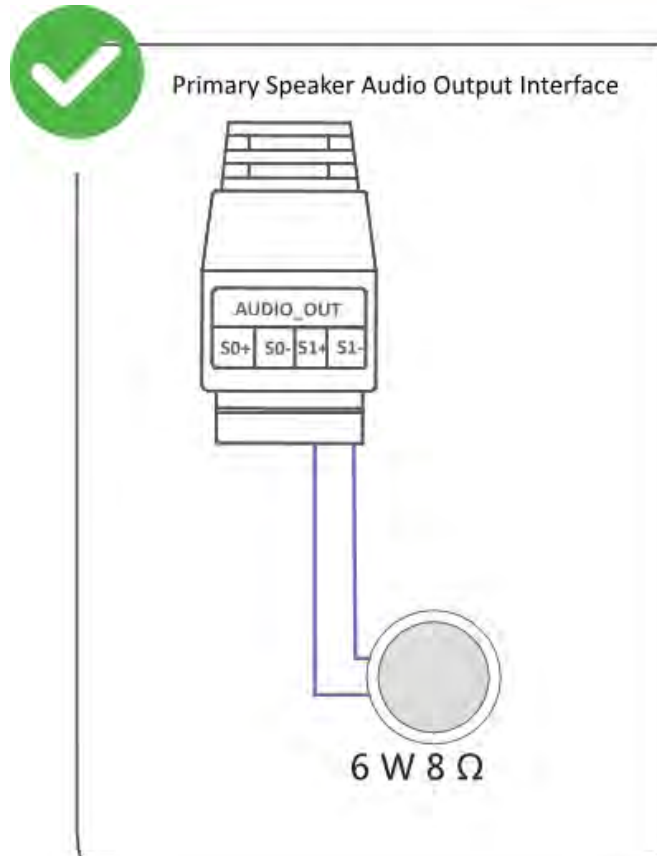

▪ Available Model

DS-QAZ0206G1-S

▪ Dimension

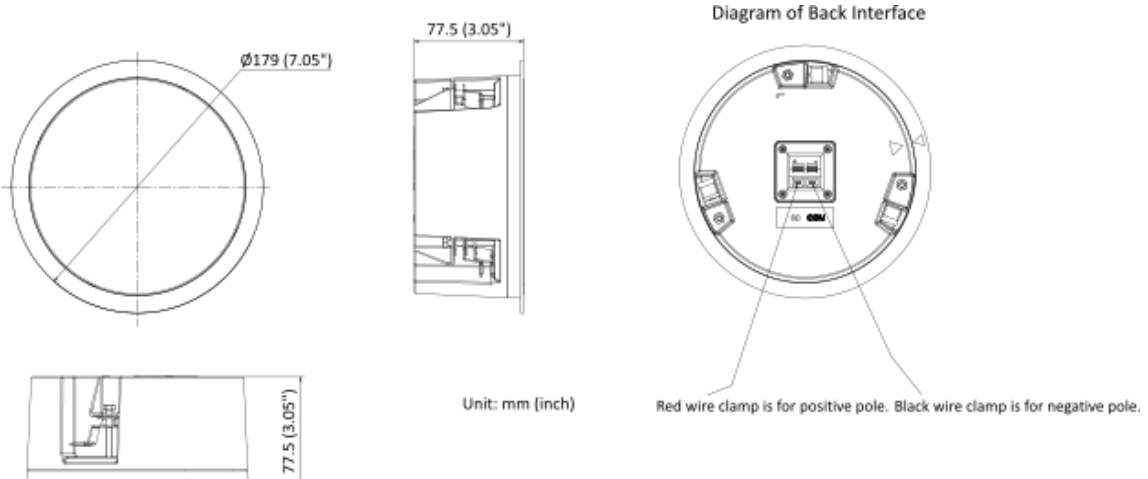



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

