


## DS-QAZ1325G1T 25 W Network Horn Speaker



- Adopt high-speed industrial grade dual core chips, built-in NOR Flash+EMMC dual storage, support dual backup of the system to ensure stable and reliable system performance.
- Support secure startup, user login locking mechanism, and password complexity prompts, support security audit log traceability, and improve system network security.
- Support batch unified management of remote platforms through IP networks (local area networks/public networks) and flexible configuration of local WEB single machines, while also support local audio collection and playback, adapting to various scene applications.
- Support alarm input, arming schedule, and audio linkage, support TTS speech synthesis and text broadcasting, with natural and smooth standard male and female dual audio options.
- Support two-way audio by SIP

## ▪ Specification


<b>Microphone</b>	
Type	electret
Amount	2
Frequency Response	100 Hz to 20 kHz
Sensitivity	-42 dBV/Pa
Sampling Rate	48 kHz
Quantization Bits	16 bit
<b>Speaker</b>	
Rated Power	25 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	110 dB
Max. Acoustic Pressure	124 dB SPL
Direction	70° horizontal by 100° vertical
Frequency Response	300 Hz to 8 kHz
SNR	83 dB
<b>Function</b>	
Audio Algorithm	AEC、AGC、ANS、DRC
Audio Bit Rate	G.711ulaw(64 Kbps)/G.711alaw(64 Kbps)/MP3(128 Kbps)
Audio File Format	MP3, WAV
NTP Timing	Support
Broadcast	Regular broadcast, live broadcast, emergency broadcast
Two-Way Audio	Support
Speech Synthesis	English
<b>Network</b>	
Network Protocol	IPv4, HTTP, HTTPS, SIP, SSL/TLS, DNS, NTP, TCP, UDP, IGMP, ICMP, DHCP, ARP, SSH
Interface Protocol (API)	ISAPI, ISUP, SIP, RTP
<b>Communication</b>	
Communication Method	Support wired network communication
<b>Interface</b>	
Ethernet Interface	RJ45 10 M/100 M Adaptive Ethernet port × 1
Alarm	Alarm input ×1
Power Output	12 VDC, 25 mA(max.)
Local Storage	Built-in 4 GB EMMC (Audio file storage is 1 GB.)
API	ISAPI, ISUP
Reset	Support
<b>General</b>	
Material	Metal
Operating Temperature	-30 °C to 60 °C(-22 °F to 140 °F)
Operating Humidity	< 90% (No condensation)
Language	5 languages: English, French, Spanish, German, Italian
Dimension	175 mm × 237 mm × 272 mm(6.9" × 9.3" × 10.7")
Power	24 VDC, 1167mA, 28W
Package Dimension	310 mm × 245 mm × 400 mm(12.2" × 9.6" × 15.6")

Weight	Approx. 2.1 kg (4.63 lb.)
With Package Weight	Approx. 3.4 kg (7.50 lb.)
Color	White
Packing List	Device × 1 Threading cap × 1 Regulatory Compliance and Safety Information × 1
<b>Approval</b>	
Protection	IP67
EMC	CE-EMC: EN 55032:2015+A11:2020+A1:2020, EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019+A2:2021, EN 55035:2017+A11:2020 RCM: AS/NZS CISPR 32: 2015 IC: ICES-003: Issue 7
Safety	CB: IEC 62368-1:2014 CE-LVD: EN 62368-1:2014/A11:2017
Environment	CE-RoHS: 2011/65/EU WEEE: 2012/19/EU Reach: Regulation (EC) No 1907/2006

▪ **Available Model**

DS-QAZ1325G1T

▪ **Dimension**

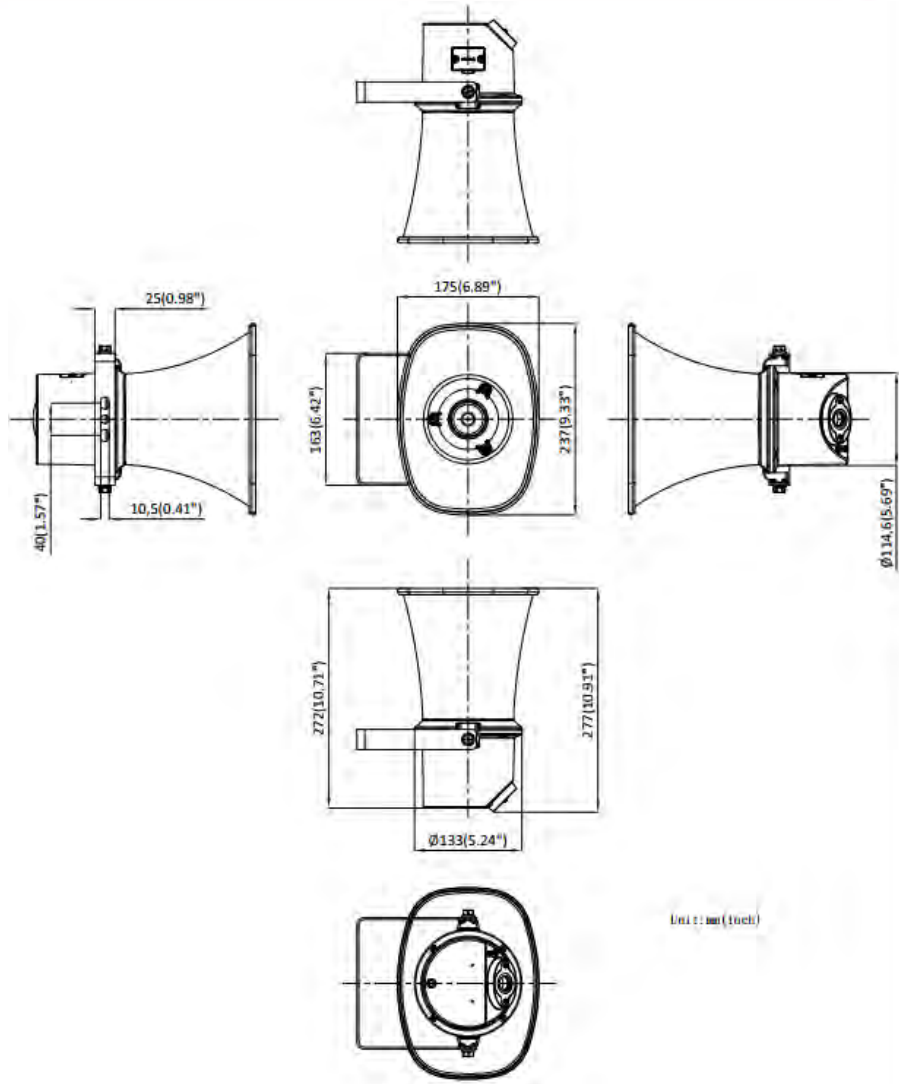

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

