


## D60x16.7SR4DE Series / D60x16.7SR4FE 2,000mm

Applicable camera (model) 1 2/3 1/1.8 1/2 1/3 1/4

60x

Applicable to 1/1.8

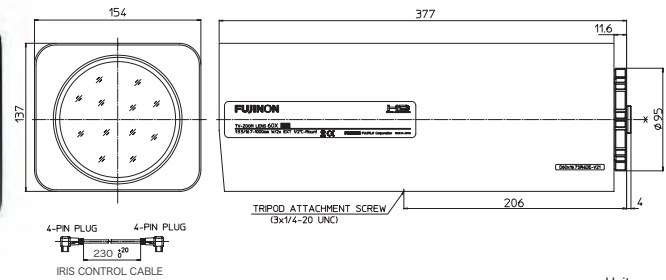

Unit : mm

Day Night VISIBLE LIGHT CUT FULL HD 2MP

Zoom MOTOR DRIVE TELE AF OS-TECH DC IRIS-REMOTE C-MOUNT METAL MOUNT Potentiometer ND Filter Extender PC Control Full Servo RoHS Compliant

ZOOM MOTOR DRIVE TELE AF OS-TECH DC IRIS-REMOTE C-MOUNT METAL MOUNT PRESET ND 2x PC SERVO RoHS

-ZP1A -ZPIC -ZPIC -V21 -ZP1A -ZP1C -ZPIC

		Applicable to 1/1.8		Applicable to 1/1.8		Applicable to 1/1.8	
		D60x16.7SR4DE-V21		D60x16.7SR4DE-ZP1A (AF)		D60x16.7SR4FE-ZP1C (AF and Anti-Vibration)	
Focal Length (mm)	1x	16.7 - 1000 (60x)					
	2x	33.4 - 2000					
Iris Range	1x	F3.5 - F16					
	2x	F7.0 - F32					
Filter		Filter ND (1/8, 1/64), Visible Light Cut					
Operation	Zoom	Motor Drive		Servo Control			
	Focus	Motor Drive		Servo Control			
	Iris	Auto(DC type) or Remote*1					
AF		N/A		Available (with analog camera)			
Optical Anti-Vibration		N/A		Available			
Temperature Correction Mechanism				○			
Angle of View (H×V)	1/1.8"	1x	WIDE	23° 5' × 17° 41'			
			TELE	0° 25' × 0° 19'			
	2x	WIDE	11° 46' × 8° 54'				
		TELE	0° 12' × 0° 9'				
1/2"	1x	WIDE	20° 53' × 15° 55'				
		TELE	0° 22' × 0° 17'				
	2x	WIDE	10° 35' × 7° 59'				
		TELE	0° 11' × 0° 8'				
Angle of View (H×V) (16:9)	1/1.8"	1x	WIDE	24° 56' × 14° 34'			
			TELE	0° 27' × 0° 15'			
		2x	WIDE	12° 47' × 7° 18'			
	1/2"	1x	WIDE	0° 14' × 0° 8'			
			TELE	22° 35' × 13° 6'			
		2x	WIDE	0° 24' × 0° 14'			
			TELE	11° 30' × 6° 32'			
Focus Range (From the Lens Front) (m)				∞ - 5			
Object imensions at M.O.D. (H × V) (4:3) (mm)	1/1.8"	1x	WIDE	1975 × 1504			
			TELE	35 × 27			
		2x	WIDE	998 × 753			
	1/2"	1x	WIDE	18 × 13			
			TELE	1782 × 1353			
		2x	WIDE	32 × 24			
			TELE	896 × 676			
Object imensions at M.O.D. (H × V) (16:9) (mm)	1/1.8"	1x	WIDE	2137 × 1237			
			TELE	38 × 22			
		2x	WIDE	1084 × 617			
	1/2"	1x	WIDE	19 × 11			
			TELE	1931 × 1111			
		2x	WIDE	34 × 20			
			TELE	974 × 553			
Back Focal Distance (in air) (mm)				17 × 10			
Exit Pupil Position (From Image Plane) (mm)				24.85			
Filter Thread (mm)				(1x) -448.80 (2x) -85.23			
Mount				M112 × 0.75			
Extender				C			
Mass (kg)		6.5		2x		7.1	
Standard Accessories				IRIS CONTROL CABLE			
Wiring Diagram				P22			

\* 1 : For details on the Iris-Remote connection, see the relevant Technical Reference (Page 27). The above product is also available in reinforced body model with axis adjustment mechanism.