


DV3.4x3.8SA-SA1

Applicable camera (model) **1 2/3 1/2 1/3 1/4**

3.4 x

Applicable to 1/2

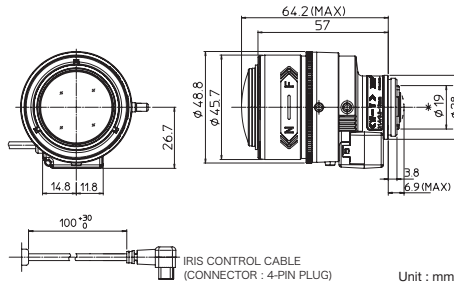

Fuji
3MP

Vari-Focal Wide Angle Long Focal DC Auto Iris C Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI WIDE TELE DC C-mt METAL ND AT F1.4 RoHS


Focal Length (mm)	3.8 - 13 (3.4x)		
Iris Range	F1.4 - T360 (Equivalent to F360)		
Operation	Zoom	Manual	
	Focus	Manual	
	Iris	Auto (DC type)*1	
Angle of View (H x V)	1/2"	WIDE	97° 34' x 71° 47'
		TELE	28° 23' x 21° 18'
	1/3"	WIDE	71° 47' x 53° 15'
		TELE	21° 18' x 15° 59'
	1/4"	WIDE	53° 15' x 39° 41'
		TELE	15° 59' x 11° 59'
Angle of View (H x V)	1/2"	WIDE	107° 12' x 58° 10'
	TELE	30° 55' x 17° 25'	
Aspect Ratio 16:9	1/3"	WIDE	78° 34' x 43° 18'
	TELE	23° 12' x 13° 04'	
Focus Range (From the Lens Front) (m)	1/4"	WIDE	58° 10' x 32° 20'
	TELE	17° 25' x 9° 48'	
Mass (g)	80		

DV10x8SA-SA1

Applicable camera (model) **1 2/3 1/2 1/3 1/4**

10 x

Applicable to 1/2

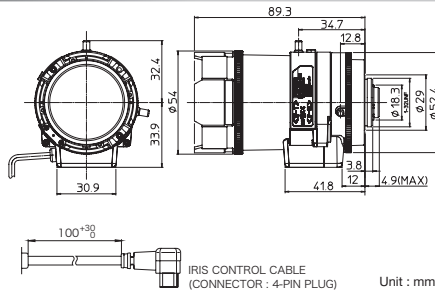

Fuji
3MP

Vari-Focal Long Focal DC Auto Iris C Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI TELE DC C-mt METAL ND AT F1.4 RoHS

Focal Length (mm)	8 - 80 (10x)		
Iris Range	F1.4 - T360 (Equivalent to F360)		
Operation	Zoom	Manual	
	Focus	Manual	
	Iris	Auto (DC type)*1	
Angle of View (H x V)	1/2"	WIDE	44° 21' x 33° 25'
		TELE	4° 38' x 3° 30'
	1/3"	WIDE	33° 25' x 25° 06'
		TELE	3° 30' x 2° 38'
	1/4"	WIDE	25° 06' x 18° 51'
		TELE	2° 38' x 1° 59'
Angle of View (H x V)	1/2"	WIDE	48° 12' x 27° 21'
	TELE	2° 52' x 5° 02'	
Aspect Ratio 16:9	1/3"	WIDE	36° 22' x 20° 32'
	TELE	3° 48' x 2° 09'	
Focus Range (From the Lens Front) (m)	1/4"	WIDE	27° 21' x 15° 24'
	TELE	2° 52' x 1° 37'	
Mass (g)	160		


SD

YV2.8x2.8LA-SA2

Applicable camera (model) **1 2/3 1/2 1/3 1/4**

2.8 x

Applicable to 1/3

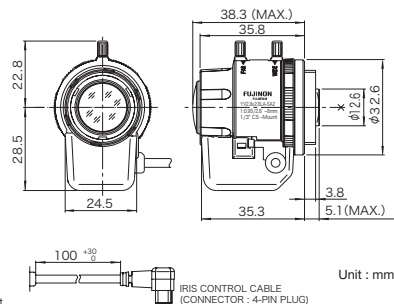

Vari-Focal Wide Angle DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI WIDE DC CS-mt METAL ND AT F0.95 RoHS


Focal Length (mm)	2.8 - 8(2.8x)		
Iris Range	F0.95 - T360 (Equivalent to F360)		
Operation	Zoom	Manual	
	Focus	Manual	
	Iris	Auto (DC type)*1	
Angle of View (H x V)	1/2"	WIDE	-
		TELE	-
	1/3"	WIDE	99° 52' x 73° 17'
		TELE	35° 14' x 26° 24'
	1/4"	WIDE	73° 17' x 54° 19'
		TELE	26° 24' x 19° 47'
Focus Range (From the Lens Front) (m)	∞ - 0.3		
Mass (g)	45		

YV10x5B-SA2

Applicable camera (model) **1 2/3 1/2 1/3 1/4**

10 x

Applicable to 1/3

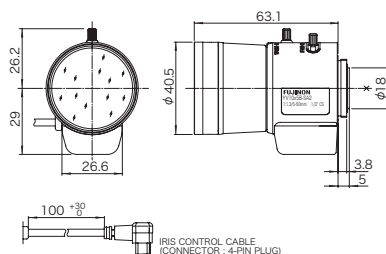

Vari-Focal Wide Angle Long Focal DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI WIDE TELE DC CS-mt METAL ND AT F1.3 RoHS

Focal Length (mm)	5 - 50(10x)		
Iris Range	F1.3 - T360 (Equivalent to F360)		
Operation	Zoom	Manual	
	Focus	Manual	
	Iris	Auto (DC type)*1	
Angle of View (H x V)	1/2"	WIDE	-
		TELE	-
	1/3"	WIDE	51° 59' x 39° 12'
		TELE	5° 24' x 4° 05'
	1/4"	WIDE	39° 12' x 29° 30'
		TELE	4° 05' x 3° 05'
Focus Range (From the Lens Front) (m)	∞ - 0.3		
Mass (g)	100		

* 1 : The iris automatically closes when the camera is turned off.

** Each of the above products is also available in long cable type (230 mm). ** Each of the above products is also available in manual type.