

HRX-1621


16CH Pentabrid DVR



Key Features

- 5-in-1 16CH Embedded DVR
- AHD/HDTVI/HDCVI/CVBS/IP inputs
- Max. Analog 16CH + NW 2CH, up to 8MP per NW camera
- H.265, H.264, MJPEG and WiseStream
- 8fps@8MP, 12fps@5MP recording
- Coaxial control
- Smart search(Only Network camera)
- Up to 8 SATA HDDs(6TB/HDD)
- HDMI/VGA local monitor
- P2P service(QR code connect)

Dimensions

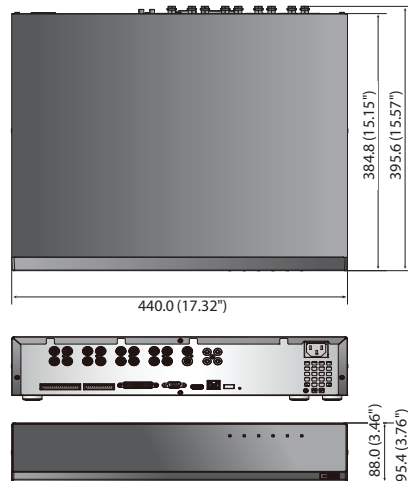

Unit : mm (inch)

HRX-1621

VIDEO		
Analog Camera	Input	16CH(1Vp-p 75ohm, BNC)
	Signal Type	AHD(8MP, 5MP, 4MP, 1080p, 720p) HDTVI(8MP, 5MP, 4MP, 1080p, 720p) HDCVI(5MP, 4MP, 1080p, 720p) CVBS(NTSC/PAL)
Network Camera	Inputs	Max. 18CH
	Resolution	8MP ~ CIF
	Protocols	SUNAPI(Wisenet), ONVIF
Live	Local Display	1x HDMI, 1xVGA (Dual monitor) HDMI : 3840 x 2160, 1920 x 1080, 1280 x 720 (1920 x 1080, Clone mode) VGA : 1920 x 1080, 1280 x 720
	Multi Screen Display	[Local monitor] 1, 2H, 2V, 3V. 4, 6(1+5), 8(1+7), 9, 13, 16, 20(5x4) / Auto sequence, [Web] 1 / 4 / 9 / sequence
	Resolution	[Analog Camera(NTSC/PAL)] - 8MP(15/12fps), 5MP(20/12fps), 4MP(30/25fps), 2MP(30/25fps), 1MP(30/25fps), 960H(or 720H)(30/25fps) * per CH [Network Camera] - Typ. 2MP(480fps)
PERFORMANCE		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Record Rate(Analog)	Analog Camera(NTSC/PAL) - (Main Stream) 8MP 8/8fps CH, 5M 12/12fps CH, 4M 15/12fps CH, 2M 30/25fps CH, 720p 30/25fps/CH, SD 30/25fps/CH - (Sub Stream) 720p or higher : 640x360 full fps/CH, SD signal : upto SD full fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.
	Recording Bandwidth	Max. 70Mbps (Analog Camera only) ~ 51Mbps (Network Camera only)
	Resolution	8MP ~ CIF
	Mode	Manual, Schedule (Continuous/Event), Event(Pre/Post), Dual Track
	Event Trigger	Alarm Input Analog Camera : Video Loss, Motion Detection, Tampering Network Camera : Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Passing, Virtual- line, (Dis)Appear, Face Detection, Audio detection), Defocus camera event
Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out	
Search & Play	Playback Bandwidth	Max. 32Mbps (18CH simultaneously)
	User	Max. 4 users (Set 1, Remote 3)
	Simultaneous Playback	18CH(Local Monitor) 4CH(CMS, Wisenet Mobile), 1CH(Web)
	Fisheye Dewarping	WEB / CMS
	Mode	Date & Time (Calendar) / Event log list / Text search (POS), Back up, Motion, Smart search (Virtual Line w/ direction, Enter / Exit) * All Search Included Preview Function ARB search
	Resolution	8MP ~ CIF
	Playback Control	Fast Forward/Backward (x2,x4,x8,x16,x32,x64, x128, x256) Slow Forward/Backward (x1/2,x1/4,x1/8) * Move one step up/down
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 8ea(Max 48TB)
Backup	File Backup	BU, EXE(Include Player), AVI(Webviewer only)
	Function	Max. 16 CH play, Date-time/title display

HRX-1621

NETWORK		
Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
DDNS	Wisenet DDNS	
Transmission speed	Analog Camera(NTSC/PAL) - (Main Stream) 8MP 8/8fps CH, 5M 12/12fps CH, 4M 15/12fps CH, 2M 30/25fps CH, 720p 30/25fps/CH, SD 30/25fps/CH, 720p 30/25fps/CH, SD 30/25fps/CH - (Sub Stream) 720p or higher : 640x360 full fps/CH, SD signal : upto SD full fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.	
Transmission	Max. 30Mbps	
Audio	Input/Output	16 Line in (Built in 4 Line, Option : Audio Extension Cable) / 1Line line out
	Compression	G.711 (N/W Cam G.711, 726)
	Audio Communication	2-Way
Max Remote Users	Search(3), Live Unicast(10), Multicast(20)	
Security	IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup)	
Viewer Software	SSM, Webviewer, SmartViewer, Wisenet Mobile Viewer Support SDK/CGI(SUNAPI) for integration to 3'rd party VMS	
FUNCTION		
Camera Setup	Register	Auto, Manual
PTZ	Control	Via GUI, Webviewer, SSM, SmartViewer, Wisenet Mobile Viewer, System Controller
	Preset	300 presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(16ch) : Multi-Profile Support Playback(4Ch Multi Playback, Max 2MP) Event push
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	ARB	Support
Easy configuration	Setup Wizard (Language Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)	
Coaxial Control	CVBS(Pelco-C)/AHD/CVI/TVI	
INTERFACE		
Front	Indicator	LED(Status indicator) : Power(1), HDD Action(1), Alarm(1), Record(1), Network(1), Backup(1)
Reset	Switch(1EA)	
HDMI	1EA	
VGA	1EA	
BNC	16CH In / 1CH Out(Spot Output)	
Audio	Out(1EA, RCA, Line)	
Ethernet	RJ-45(10/100/1000BASE-T)	
Alarm	In 16EA, Out 4EA - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)	
USB	2EA(Front USB2.0, Rear USB 3.0)	
Serial(Protocols)	RS-485/422 (Samsung-T/Pelco-D/Pelco-p) * for PTZ	
Power inlet	1EA AC	

HRX-1621

SYSTEM		
Log	Log List	Max. 20,000 (System Log, Event Log each)
System Control		Mouse, IR Remocon, Webviewer, System Controller(SPC-7000, SPC-6000, SPC-2000)
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
ENVIRONMENTAL		
Operating Temperature		0°C to +40°C(+32°F to +104°F)
Operating Humidity		20% ~ 85% RH
Certification		UL, CE, FCC, KC
ELECTRICAL		
Power Input		100~240 VAC±10%, 50/60 Hz
Power Consumption		Max. 180W (6T HDD 8ea)
MECHANICAL		
Color / Material		Black / Metal
Dimension (WxHxD)		440 x 88 x 384.8mm(17.32" x 3.46" x 15.15")
Weight		Approx. 5.6Kg (12.4 lb, 4TB HDD 1ea)

* The latest product information / specification can be found at hanwha-security.com
 * Design and specifications are subject to change without notice.
 * Wisenet is the proprietary brand of **Hanwha Techwin**.