

# HRX-835

8CH Pentabrid DVR



FC | UL LISTED | CE | EAC

## Key Features


- 5-in-1 8CH Pentabrid DVR
- AHD/HDTVI/HDCVI/CVBS/IP inputs
- Total 10 Ch (Max. Supported: Analog 8CH and Network 8CH), up to 8MP
- H.265, H.264, MJPEG codec
- 8/8fps@8MP, 12/12fps@5MP recording
- Coaxial control
- Up to 4 SATA HDDs(6TB/HDD)
- HDMI/VGA Dual monitor
- P2P service (QR code connect)

Display		
Analog camera	Inputs	8CH(1Vp-p 75ohm, BNC)
	Signal Type	AHD(8MP, 5MP, 4MP, 1080p, 720p) HDTVI(8MP, 5MP, 4MP, 1080p, 720p) HDCVI(5MP, 4MP, 1080p, 720p) CVBS(NTSC/PAL)
Network camera	Inputs	Max. 10CH
	Resolution	8MP ~ CIF
	Protocols	SUNAPI(Wisenet), ONVIF
Live	Local Display	1x HDMI, 1x VGA (Dual monitor) HDMI: 3840 x 2160, 2560x1440, 1920x1080, 1280x1044, 1280x720 (Expand mode 1920x1080) VGA: 1920x1080, 1280x1024, 1280x720 (Expand 1024*768)
	Resolution	[Analog Camera(NTSC/PAL)] - 8MP(15/12fps), 5MP(20/12fps), 4MP(30/25fps), 2MP(30/25fps), 1MP(30/25fps), 960H(or 720H)(30/25fps) * per CH [Network Camera] - Typ. 2MP(240fps)
Performance		
Record	Compression	H.265, H.264, MJPEG
	Record Rate(Analog)	Analog Camera (Main Stream) 8MP 8/8fps CH, 5M 12/12fps, 4M 15/12fps, 2M 30/25fps, 720p 30/25fps, 960H/640H 30/25fps(NTSC/PAL per CH) (Sub Stream) 720p or higher : 640x368 full fps/CH, SD signal : upto CIF full fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.
	Recording Bandwidth	Max. 50Mbps
	Resolution	8MP ~ CIF
	Mode	Manual, Schedule (Continuous/Event), Event(Pre/Post), Dual Track
	Event Trigger	Alarm Input Analog Camera : Video Loss, Motion Detection, Tampering Network Camera : Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Passing, Virtual- line, (Dis)Appear, Face Detection, Audio detection), Defocus camera event, Dynamic camera event
	Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out
Search & Play	Playback Bandwidth	Max. 32Mbps (10CH simultaneously)
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	8CH(Local Monitor, CMS, Wisenet Mobile) 1Ch(Web)
	Fisheye Dewarping	WEB / CMS
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 4ea(Max 24TB)
Backup	File backup	BU, EXE(Include Player), AVI(Webviewer only)
	Function	Max. 10 CH play, Date-time/title display
Functions		

<b>PTZ</b>	<b>Control</b>	Via GUI, Webviewer, SSM, SmartViewer, Wisenet Mobile Viewer, System Controller
<b>Smart phone</b>	<b>Support Model</b>	iOS, Android
	<b>Protocol Support</b>	RTP, RTSP, HTTP, CGI(SUNAPI)
	<b>Control</b>	Live(8ch) : Multi-Profile Support Playback(4Ch Multi Playback, Max 2MP) Event push
	<b>Max. Remote Users</b>	Search(3), Live Unicast(10)
<b>Redundancy</b>	<b>ARB</b>	Support
<b>Easy configuration</b>		Setup Wizard (Language, Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)
<b>Coaxial Control</b>		CVBS(Pelco-C)/AHD/CVI/TVI
<b>Interface</b>		
<b>HDMI</b>		1EA
<b>VGA</b>		1EA
<b>BNC</b>		8CH In / 1CH Out(Spot Output)
<b>Audio</b>		Out(1EA, RCA, Line)
<b>Ethernet</b>		RJ-45(10/100/1000BASE-T)
<b>Alarm</b>		In 8EA, Out 4EA - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)
<b>USB</b>		2EA(Front USB2.0, Rear USB 3.0))
<b>Serial(Protocols)</b>		RS-485/422 (Samsung-T/Pelco-D/Pelco-p) * for PTZ
<b>Power inlet</b>		1EA AC
<b>System</b>		
<b>System Control</b>		Mouse, Webviewer, System Controller(SPC-7000, SPC-6000, SPC-2000)
<b>Language</b>		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
<b>Environmental</b>		
<b>Operating Temperature</b>		0°C to +40°C(+32°F to +104°F)
<b>Operating Humidity</b>		20% ~ 85% RH
<b>Certification</b>		UL, CE, FCC, KC
<b>Electrical</b>		
<b>Power Input</b>		100~240 VAC ± 10%, 50/60 Hz
<b>Power Consumption</b>		Max. 120W (6T HDD 4ea) TBD
<b>Mechanical</b>		
<b>Color / Material</b>		Black / Metal
<b>Dimension (WxHxD)</b>		440 x 88 x 384.8mm(17.32" x 3.46" x 15.15")
<b>Weight</b>		Approx. 4.6Kg (10.14 lb, 4TB HDD 1ea)

<b>Network</b>		
<b>Protocol</b>	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
<b>DDNS</b>	Wisenet DDNS	
<b>Transmission speed</b>	Analog Camera (Main Stream) 8MP 8/8fps CH, 5M 12/12fps, 4M 15/12fps, 2M 30/25fps, 720p 30/25fps, 960H/640H 30/25fps(NTSC/PAL per CH) (Sub Stream) 720p or higher : 640x368 full fps/CH, SD signal : upto CIF full fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.	
<b>Transmission Bandwidth</b>	Max. 64Mbps	
<b>Audio</b>	<b>Input/Output</b>	8 Line in / 1 Line out
	<b>Compression</b>	G.711 (N/W Cam G.711, 726)
	<b>Audio Communication</b>	2-Way
<b>Max Remote Users</b>	Search(3), Live Unicast(10), Multicast(20)	
<b>Security</b>	IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup) Device Certificate(Hanwha Techwin Root CA)	
<b>Viewer Software</b>	SSM, Webviewer, Smart Viewer, Wisenet mobile Support SDK/CGI(SUNAPI) for integration to 3 <sup>rd</sup> party VMS	

- The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

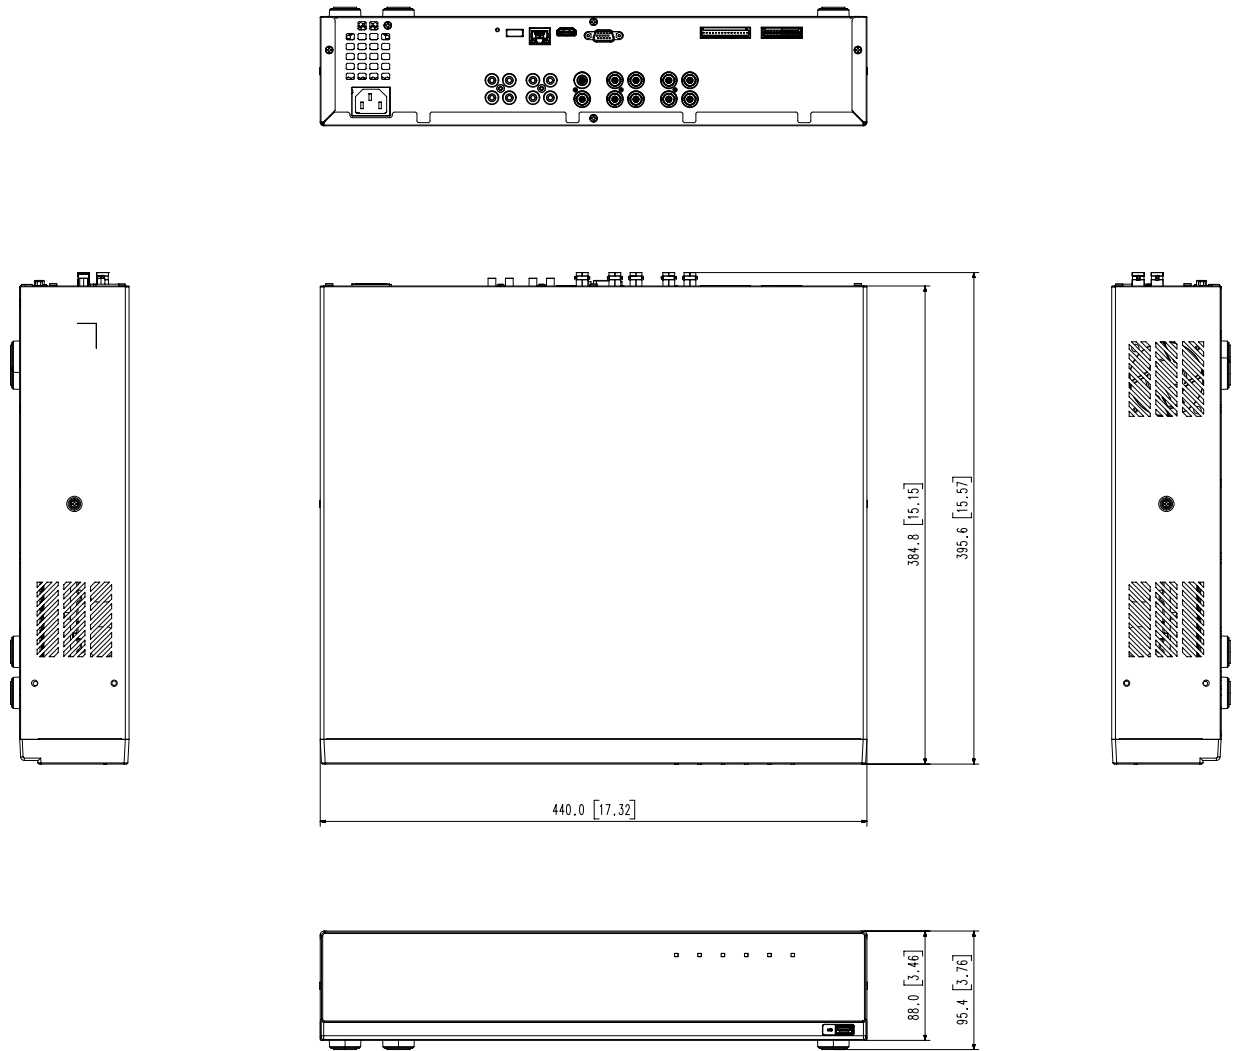

Appearance drawing HRX-835  
Unit : mm [inches]