



SPA-S1000

IP Audio Server



Key Features

- System Expansion: Up to 512 speakers
- Supported Protocol: IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- TTS: English(US, UK), German, French, Spanish, Russian
- Ethernet: 100/1000 Base-T

SPA-S1000

IP Audio Server



Specifications

Product	
Type	IP Audio Server
Network	
Ethernet	10/100 Base-T
General	
Operating Temperature	-10 ~ +40°C (+14°F ~ +104°F)
Operating Humidity	10~85% RH (Non-Condensing)
Weight	3.02Kg
Size	482(W) × 44(H) × 280(D)mm
Color	Black
Certificate	EMC : KS C 9832/9835, EN 55032/55035, FCC Part 15 Subpart B, ICES-003 Safety : KC 62368-1, EN 62368-1, UL 62368-1, CAN/CSA C22.2 No.2 62368-1
Power	
PoE	AC 120-240V, 50/60Hz, 10W, DC 24V, 350mA
Network Protocol	
Security	Password protection : admin,setup,user,guest (sha-2, Digest authentication, User access log) Digest authentication, User access log
Supported Protocols	IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
System Integration	
API (Application Programming Interface)	SUNAPI
Multi-source Dynamic PA control	Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH) Up to 512 Zone Control (Multicast) Up to 20 Zone Control (Unicast) Up to 255 Groups
Functional Monitoring	Connection verification, Built-in system logging


SPA-S1000

IP Audio Server



CAD

Unit:mm [inch]

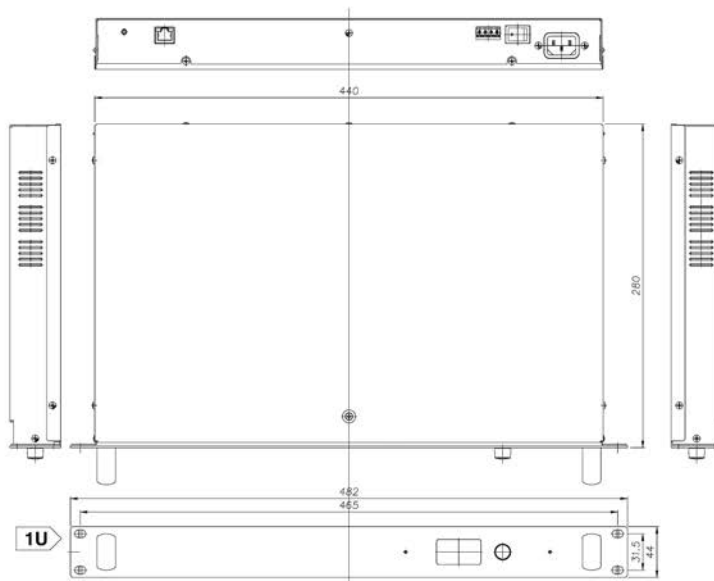

3	MODEL2	
2	MODEL1	
1	SPA-S1000	'22.7.15
No.	MODEL NAME	DATE
Unit:mm[inch]		SCALE:1/1
Hanwha Techwin		

© Hanwha Technoln Co.,Ltd. All rights reserved.