

## DS-3E0505D-O 5-Port Gigabit Plastic Switch

DS-3E0505D-O provides five 10/100/1000 Mbps Ethernet ports which support line speed forwarding. With simple and mini exquisite body, the switch is plug and play and easy to use, suitable for home, school, dormitory, office, small monitoring and other simple network environments.

- 5 x 10/100/1000 Mbps ethernet port
- Supports ADI/ADIX
- Store-and-forward switching
- Supports MAC address auto-learning and aging
- Simple, compact body design
- Supports desktop and wall-mounting
- Plug & play, easy to use.



## Specification


- Specification		
General		
Shell	ABS	
Net Weight	0.059 kg (0.13 lb)	
Dimensions (W × H × D)	87.00 mm × 25.00 mm × 51.00 mm (3.43" × 0.98" × 2.01")	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)	
Storage Temperature	–40 °C to 85 °C (–40 °F to 185 °F)	
Operating Humidity	5% to 95% (no condensation)	
Relative Humidity	5% to 95% (no condensation)	
Power Supply	5 V DC, 0.6 A	
Installation Mode	Desk-Mounted	
Max. Power Consumption	3 W	
Surge Protection	2 kV	
Network Parameters		
Ports	5 × Gigabit RJ45 port	
MAC Address Table	2 K	
Switching Capacity	10 Gbps	
Packet Forwarding Rate	7.44 Mpps	
Internal Cache	1 Mbits	
Approval		
	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1:	
EMC	2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue	
	7:2020),RCM (AS/NZS CISPR 32: 2015)	
Safety	CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN	
Salety	62368-1: 2014+A11: 2017)	
Chemistry	CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)	

## Available Model


DS-3E0505D-O



# Typical Application

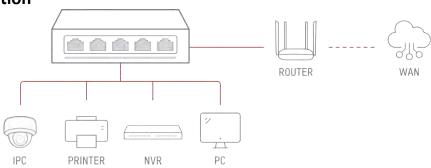


## Physical Interface

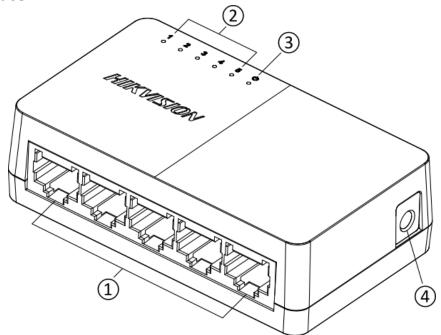



No.	Indicator/Port	Description
1	Gigabit RJ45 Port	Used for connection to another device via a network cable.
2	LINK/ACT Indicator	Indicates the statuses of Gigabit RJ45 ports 1 to 5.
3	PWR Indicator	Indicates the power status of the switch.
4	Power Supply	Use the attached power adapter or power cord to connect the switch to a socket.




#### Dimension














Headquarters
No.555 Qlanmo Road, Birijiang District.
Hangzhou 310051, China
T +86-571-8807-5998
www.hikviston.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ.



HikvisionHQ.



Hikvision\_Global



Hikvision Corporate Channel



6 hikvisionhq