

DS-KD9203-FE6

Face Recognition Door Station with 4.3-inch Screen

HIKVISION®



Key Feature


- 2 MP HD camera with high quality image
- 120 ° wide angle of view
- Up to 5000 faces, 5000 fingerprints and 25000 cards can be added
- Unlocks by fingerprints, cards and faces
- Supports anti-spoofing
- Supports configuration via Web remotely

Specification

System Parameters	
Operation Method	Display screen, physical buttons
Operation System	Embedded Linux operation system
RAM	1 GB
ROM	4 GB
Alarm parameters	
Tampering alarm	1
Network parameters	
Network protocol	TCP/IP, RTSP
Network interface	10/100/1000 Mbps self-adaptive Ethernet
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker

Audio compression	G.711 U, G.711 A
standard	
Audio compression rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Audio intercom	Two-way audio
General	
Power supply	12 VDC
Power consumption	≤ 13 W
Working temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Working humidity	10% to 90%
Weight	1.05 kg (without package) 2.166 kg (with package)
IP protection level	IP 65
Installation	Flush mounting
Material	Plastic & glass
Video parameters	
Video frame rate	50 Hz, 60 Hz
Night Vision	Low illumination, IR supplement lights
Video compression Standard	H.264

Wide dynamic range	True WDR
Camera	2 × 2 MP HD camera
Stream	Main stream: 1080p@30fps, 720p@30fps Sub stream: VGA@25fps, VGA@30fps
Display Parameters	
Display Screen	4.3-inch colorful LCD
Display Resolution	800 × 480
Access control Parameters	
Card type	Mifare card
Device interfaces	
I/O input	4
I/O output	0
RS-485	2
USB	0
Debugging port	1
Door control	1
Performances	
Fingerprints capacity	Max. 5000
Card capacity	Max. 25000
User capacity	Max. 10000
Face capacity	Max. 5000
Linked indoor station	Max. 500
Linked sub door station	Max. 8
Protocol	ISAPI, RTSP, SNMPv1,v2,v3
Unlock door	Unlock by presenting cards, unlock by face, unlock via Client Software, unlock by indoor station
Face anti-spoofing	Support
Face recognition distance	2 m
Face recognition time	≤ 0.2 s

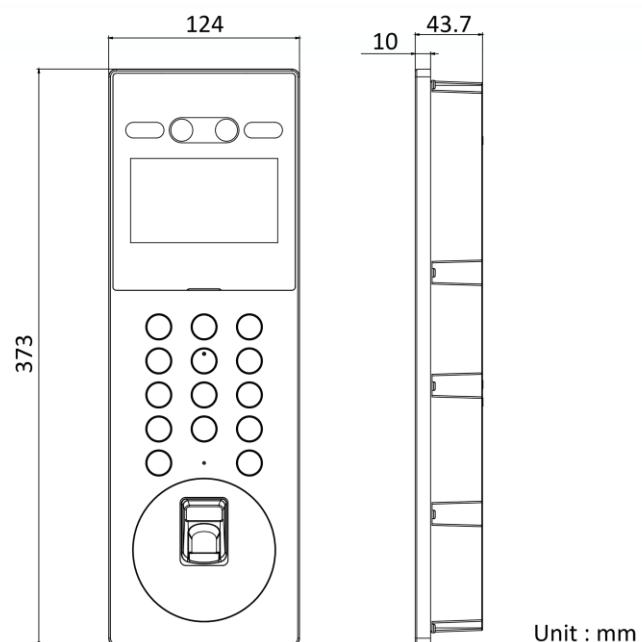

Unit : mm

Available Model

DS-KD9203-FE6

Dimension



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramanikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Lafam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85- 330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikla.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
Info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-10)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com