

DS-K1F600U-D6E-F Enrollment Station



The enrollment station can realize multiple user information's enrollment on one device. It supports enrolling face picture, fingerprint (parts of the device model support), 13.56 MHz IC card No., and 125KHz ID card No.

- 3.97-inch LCD touch screen for face recognition, parameters configuration, live view, etc.
- 2 MP wide-angle dual-lens
- Face anti-spoofing, Face recognition distance: 0.3 m to 1.5 m
- Deep learning algorithm
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%
- 2,000 user capacity, 2,000 face capacity, 20,000 card capacity, and 20,000 fingerprint capacity
- Enrolls data via the device and transmits the data from the device to the platform via TCP/IP/Type C USB interface; Enrolls data remotely via the client software
- Stand-alone operation: Manage, search and set device data after logging in the device locally






▪ Specification

System	
Operating system	Linux
Display	
Screen size	3.97-inch
Operation method	Touch
Type	Capacitive
Resolution	800 × 480
Video	
Lens	2
Resolution	2 MP
WDR	Support
Network	
Wired network	TCP/IP
Wi-Fi	Support
Interface	
USB	Supports 1 USB interface and 1 Type C USB interface (Type C USB interface is used for communicating with the platform.)
Capacity	
User capacity	2000
Face capacity	2000
Fingerprint capacity	20,000 (10 fingerprints per person)
Card capacity	20,000 (The displayed capacity on the device screen varies according to the configured enrollment rules)
Event capacity	2000 offline enrollment records
Authentication	
Face recognition distance	0.3 m to 1.5 m
Card type	EM card, Mifare 1 card, DESfire card, Felica card
Card reading frequency	13.56MHz, 125KHz
Card reading distance	0 to 5 cm
Function	
Face anti-spoofing	Support
Audio prompt	Support
Time synchronization	Support
General	
Power supply	12 VDC, 15 W, Round
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%
Dimensions	121.6 mm × 137.9 mm × 125 mm (4.8" × 5.4" × 4.9")
Installation	Base mounting
Application environment	Indoor

▪ Available Model

DS-K1F600U-D6E-F

▪ Dimension

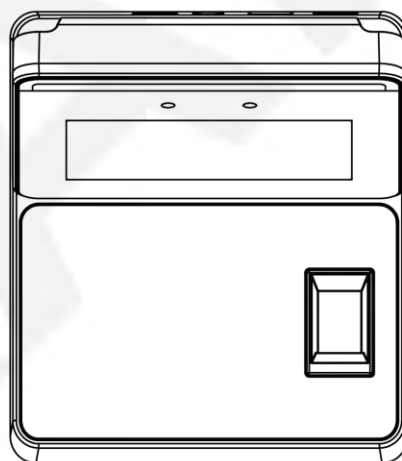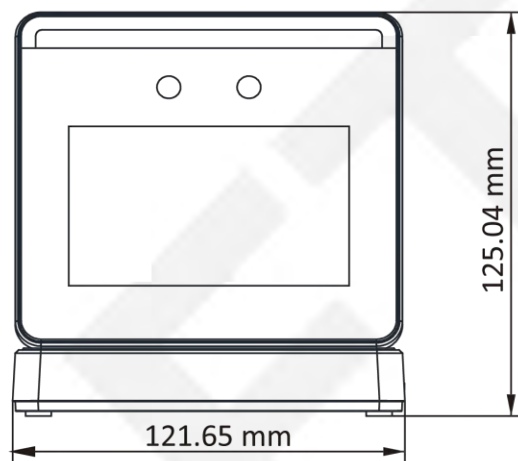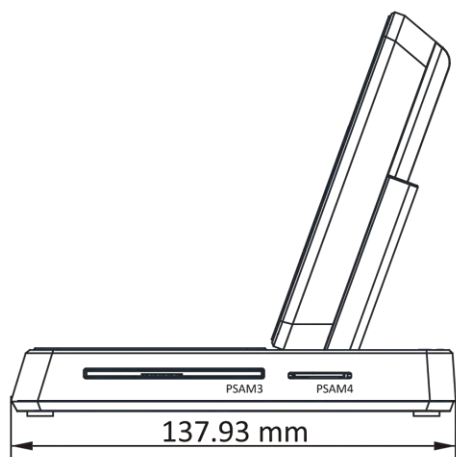

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com