

**DS-K3G501SX
Tripod Turnstile**

The DS-K3G501 series tripod barrier is designed to detect unauthorized entrance or exit. By adopting the turnstile integratedly with the access control system, person should authenticate to pass through the lane via presenting IC or ID card, scanning QR code, etc. It is widely used in attractions, stadiums, construction sites, residences, etc.

- TCP/IP network communication: the communication data is specially encrypted to relieve the concern of privacy leak.
- Barrier open/closed, free accessing, forbidden mode are selectable.
- Bidirectional (entering/exiting) lane
- Remote control and management
- LED indicates the entrance/exit and passing status.
- Fire alarm passing: when the fire alarm is triggered, the barrier will be dropped automatically for emergency evacuation.
- Valid passing duration settings: system will cancel the passing permission if a person does not pass through the lane within the valid passing duration.



▪ Approval

CE/FCC/CB/RoHS/REACH/WEEE

▪ Specification




System	
MCBF	> 3 million times
Interface	
RS-232	4
RS-485	4
Lock output	2
IO input	2
IO output	2
Network interface	1
Capacity	
Card capacity	60,000
Event capacity	180,000
General	
Throughput	More than 35 persons per minute The actual throughput is affected by the person passing rate and passing method.
Power supply method	100 to 240 VAC; 50 to 60 Hz
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Lane width	550 mm
Working humidity	0% to 95% (no condensing)
Dimensions	Without package: 232 mm × 960 mm × 1208 mm (9.1" × 37.8" × 47.6") With package: 390 mm × 1185 mm × 1320 mm (15.4" × 46.7" × 52.0")
Pedestal material	SUS304 stainless steel
Application environment	Indoor and outdoor
Protective level	IP54
Weight	Without package: 45 kg (99.2 lb) With package: 69 kg (152.1 lb)
Approval	CE/FCC/CB/RoHS/REACH/WEEE
Configuration	
Module selection	YES
Authentication mode	Card,Face,Fingerprint,QR code
Card type	EM,M1
Wall distance	10 mm
Lane width	550
Recommended width	550
Pedestal width	230 mm
Pedestal length	1210 mm
Barrier material	Stainless steel pipe
Base	YES
Side pedestal	YES

Base model	DS-K3G501-BASE
Side pedestal type	Empty (230 mm)/fence (130 mm)
Product type	Tripod Turnstile
Remote controller type	433 Mhz,868 Mhz


▪ **Available Model**

DS-K3G501SX-R/MPg-Dm55(O-NEU)/ESD

▪ **Dimension**

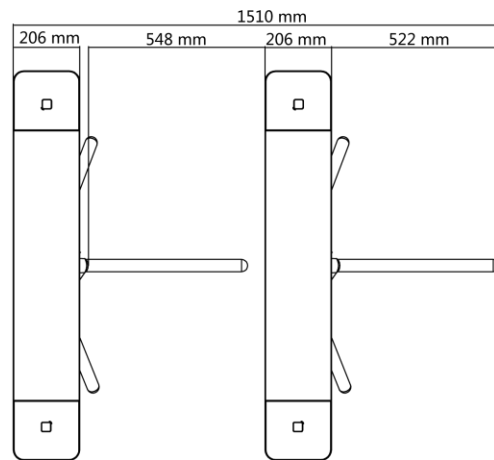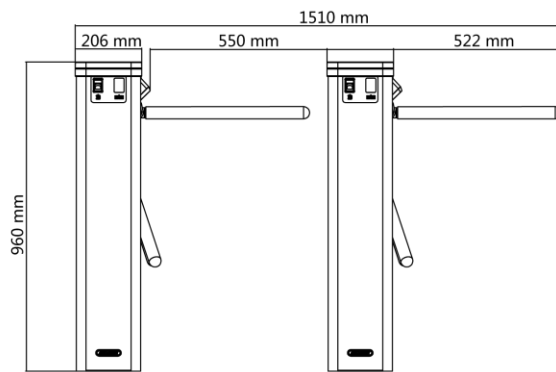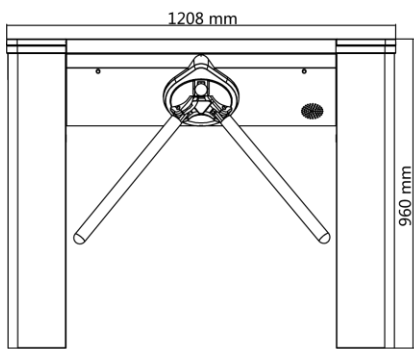

- **Accessory**
- **Included**

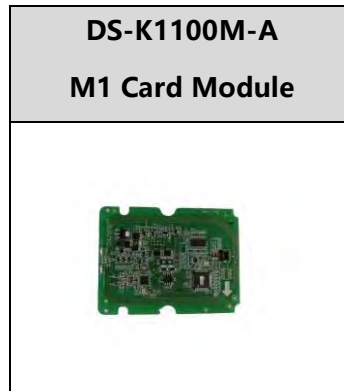

- **Optional**

<p>DS-K7F01 Fence of K3G501</p>	<p>DS-KAB-COVER Barrier's Face Recognition Install Hole's Cover</p>	<p>DS-K3G501-BASE DS-K3G501-BASE</p>
		

Distributed by

**HIKVISION****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com