

DS-KAD7061EY 2-wire HD Distributor



- 4 channels floor-shunt for Indoor station, support cascading
- Small-size device, save installation space
- 6 indicators show whether the device is working properly
- No power supply required




Specification


Device interfaces	
Two-Wire interface	4(Two-Wire interface for indoor station)
Cascade interface	2
General	
Installation	Surface mounting
Indicator	6
Dimension (W × H × D)	70.6 mm × 60 mm × 25 mm (2.78" × 2.36" × 0.98")
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90% (no-condensing)
Power consumption	≤ 2W

Available Model

DS-KAD7061EY

Dimension



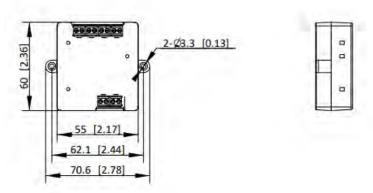

Unit:mm [inch]
SCALE 1:1



Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision Corporate Channel



(i) hikvisionhq