

DS-3E1326P-EI

Smart Managed 24-Port 100 Mbps PoE Switch

Smart managed switches are developed by Hikvision, featuring in easy management and maintenance. You can easily deploy, monitor and expand your surveillance system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance.



Visualized Topology Management



Network Health Monitor



Real-Time Alarm Push



Video Control and Preview

Key Feature

- 24 × 100 Mbps PoE RJ45 ports, 2 × gigabit combos.
- IEEE 802.3at/af standard for PoE ports.
- Network topology management, alarm push, network health monitor.
- 6 KV surge protection for PoE ports.
- AF/AT camera can reach up to 300 m in extend mode.




Specification


| Model | | DS-3E1326P-EI |
|--------------------|---|---|
| Network parameters | Port number | 24 × 100 Mbps PoE RJ45 ports, and 2 × gigabit combos. |
| | Port type | RJ45 port, full duplex, MDI/MDI-X adaptive |
| | Standard | IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab and IEEE 802.3z |
| | Forwarding mode | Store-and-forward switching |
| | Working mode | Standard mode (default), Extend mode |
| | High priority ports | Ports 1 to 8 |
| | Ports for long-distance transmission | Ports 1 to 24 |
| | MAC address table | 16 K |
| | Switching capacity | 8.8 Gbps |
| | Packet forwarding rate | 6.5472 Mpps |
| | Internal cache | 4 Mbits |
| PoE power supply | PoE standard | Ports 1 to 24: IEEE 802.3af, IEEE 802.3at |
| | PoE power pin | Ethernet cables 1/2/3/6 and 4/5/7/8 provide power supply simultaneously. |
| | PoE port | Ports 1 to 24 |
| | Max. port power | 30 W |
| | PoE power budget | 370 W |
| Software function | Device maintenance | Support remote upgrade, recovering default parameters, viewing logs, configuring basic network parameters. |
| | Typology display | Support typology display. |
| | Port configuration | Support rate, flow control, and switch configuration |
| | PoE function | IEEE 802.3at/af device provides power supply. |
| | VIP ports function | Support data of ports in red area forwarded in priority. |
| | Link aggregation | Support G1, G2 port static link aggregation |
| | Device status alarm | Support the device status, PoE_MAX and PoE status alarm. |
| | Network management | Support client management. |
| General | Port statistics | Support port transmitting/receiving real-time rate statistics, 7-day transmitting/receiving peak rate statistics. |
| | Shell | Metal material, fan-free design |
| | Net Weight | 2.83 kg (6.24 lb) |
| | Dimension (L × H × D) | 440 mm × 44 mm × 221 mm (4.76" × 3.47" × 1.09") |
| | Operating temperature | -10°C to 55°C (14°F to 131°F) |
| | Storage temperature | -40°C to 85°C (-40°F to 185°F) |
| | Operating humidity | 5% to 95% (no condensation) |
| | Storage humidity | 5% to 95% (no condensation) |
| | Power supply | 100~240 VAC, 50/60Hz, Max. 6.5 A |
| | Max. power consumption | 400 W |
| Approval | Power source | 400 W |
| | EMC | FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016) |
| | Safety | UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013) |
| Chemistry | CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006) | |

Physical Interface

Front panel:

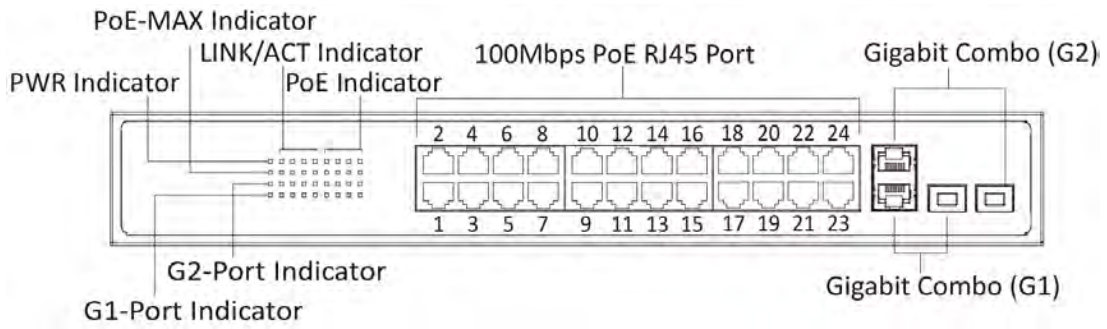


Rear panel:

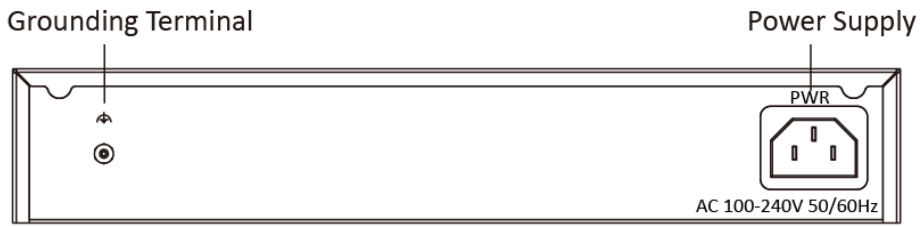


Available Model

DS-3E1326P-EI


Dimension (unit: mm)

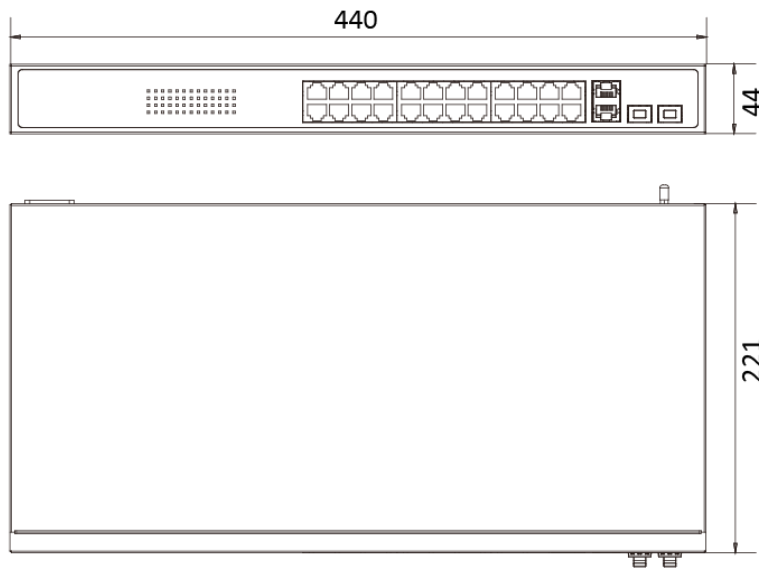

Typical Application

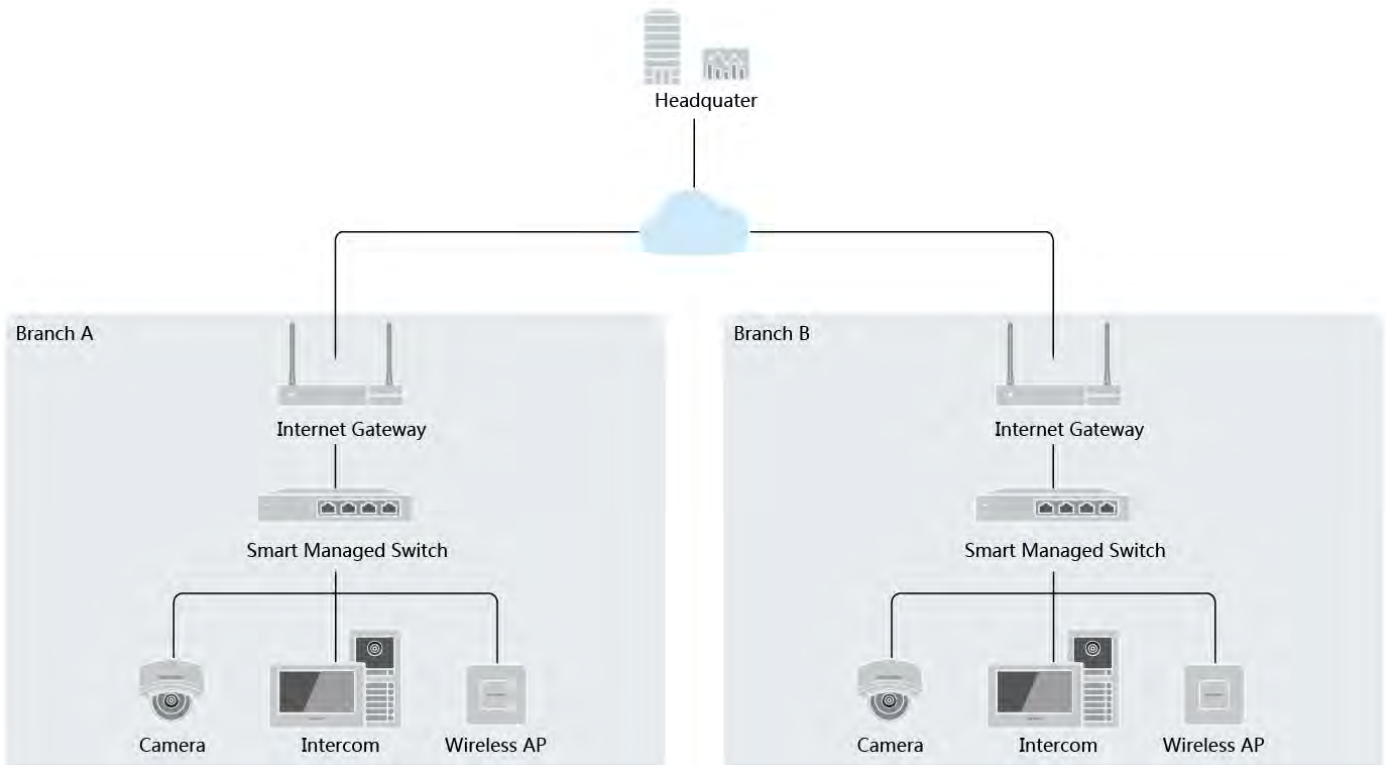

Distributed by

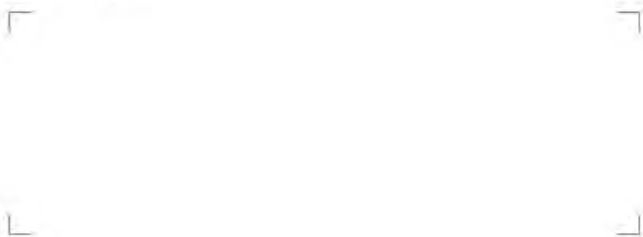

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-0131-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com