

DS-3E0105-O 5-Port Fast Ethernet Switch



DS-3E0105-O provides five 10/100 Mbps Ethernet ports which support line speed forwarding. With simple and mini exquisite body, the switch is plug and play and easy to use, suitable for home, school, dormitory, office, small monitoring and other simple network environments.

- 5 × 10/100 Mbps RJ45 Port
- Easy Plug-and-Play Installation
- Desk-and Wall-Mounting
- Rugged Metal Case, Exquisite and Beautiful Design


▪ Specification

| Model | | DS-3E0105-O |
|--------------------|---------------------------|---|
| General | Shell | Metal material, fan-free design |
| | Net Weight | 0.15 kg (0.3307 lb) |
| | Gross Weight | 0.3 kg (0.6615 lb) |
| | Dimensions (W × H × D) | 103.05 mm × 25.6 mm × 61.1 mm (4.06" × 1.01" × 2.41") |
| | Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F) |
| | Storage Temperature | -40 °C to 85 °C (-40 °F to 185 °F) |
| | Operating Humidity | 5% to 95% (no condensation) |
| | Relative Humidity | 5% to 95% (no condensation) |
| | Power Supply | 5 V DC, 1 A |
| | Max. Power Consumption | 5 W |
| | Power Consumption in Idle | < 5 W |
| | Surge Protection | 2 kV |
| Network Parameters | Ports | 5 × 10/100 Mbps RJ45 port |
| | MAC Address Table | 1 K |
| | Switching Capacity | 1 Gbps |
| | Packet Forwarding Rate | 0.75 Mpps |
| | Internal Cache | 0.448 Mbits |
| Approval | EMC | FCC (47 CFR Part 15, Subpart B),CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020) |
| | Safety | UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017) |
| | Chemistry | CE-RoHS (2011/65/EU),WEEE (2012/19/EU),Reach (Regulation (EC) No.1907/2006) |

▪ Available Model


DS-3E0105-O

▪ Typical Application

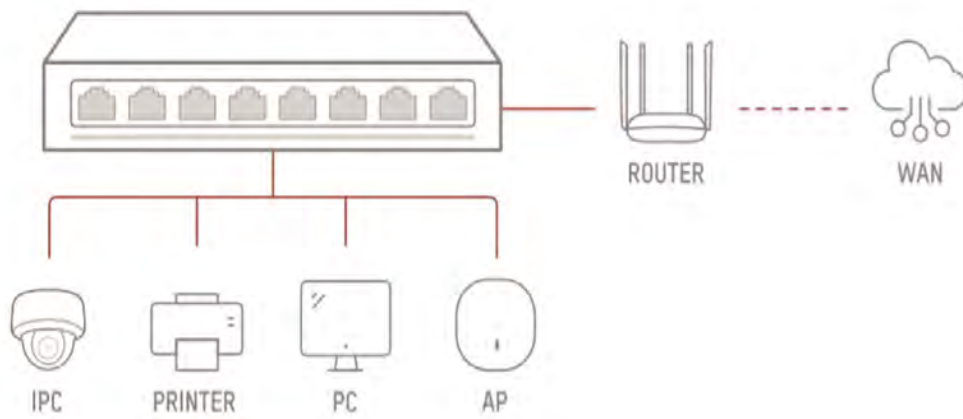


▪ Physical Interface

Front Panel


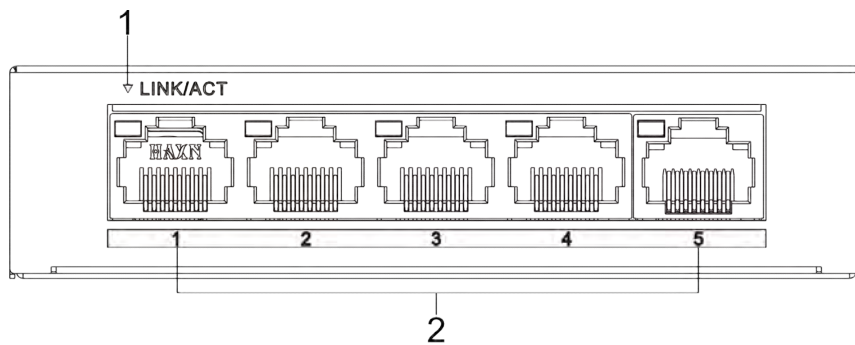


Rear Panel

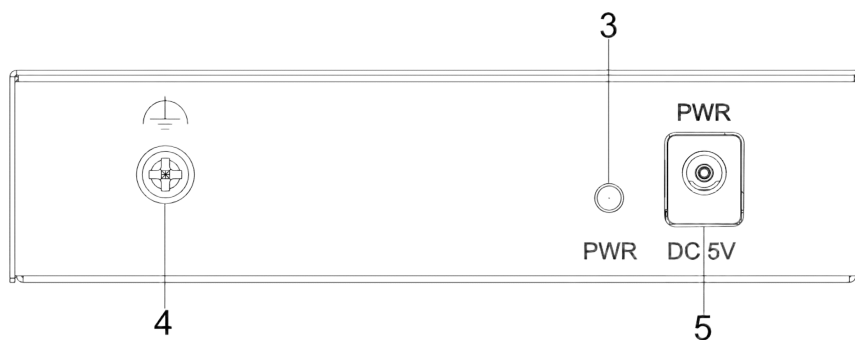

| No. | Indicator/Port |
|-----|-----------------------|
| 1 | LINK/ACT Indicator |
| 2 | 10/100 Mbps RJ45 Port |
| 3 | PWR Indicator |
| 4 | Grounding Terminal |
| 5 | Power Supply |

▪ Dimension (Unit: mm)

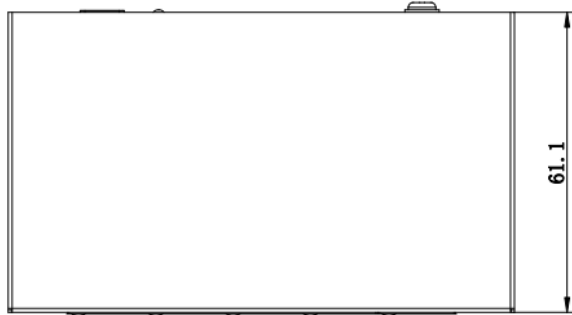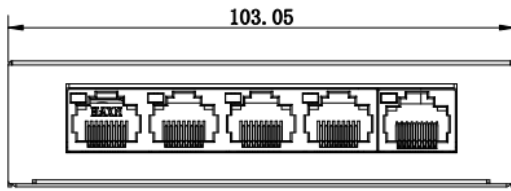

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq