





PR2200ELCDSXL/PR3000ELCDSXL



### PROFESSIONAL UPS TO SAFEGUARD IT EQUIPMENT



### The professional UPS with Automatic Voltage Regulation to stabilize the AC power output for business applications

Designed for computer room and server room applications, the Professional Tower Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output with Pure Sine Wave to ensure high power quality. The UPSs feature hot-swappable battery packs for maintenance without power interruption. The products are also compatible with power management software to easily control and monitor the UPS system.

#### APPLICATION


- SOHO Office
- Back Office
- Data Center
- Factory
- Train Station
- Office
- Server Room
- Supermarket
- Airport

#### SERIES FEATURES

- Line-interactive UPS Topology
- Active PFC Compatible
- Automatic Voltage Regulation (AVR)
- LCD Status Display
- PowerPanel® Management Software
- Energy Saving Technology
- Pure Sine Wave Output
- Hot-swappable Batteries
- Emergency Power Off (EPO) Port
- SNMP/HTTP Remote Management Capability (Optional)

#### PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button(s)
5. Battery Backup & Surge Protected Outlets
6. Input Circuit Breaker
7. Output Circuit Breaker
8. AC Inlet
9. Serial Port
10. USB Port
11. SNMP/HTTP Network Slot
12. EPO Port
13. Extended Battery Module Connector

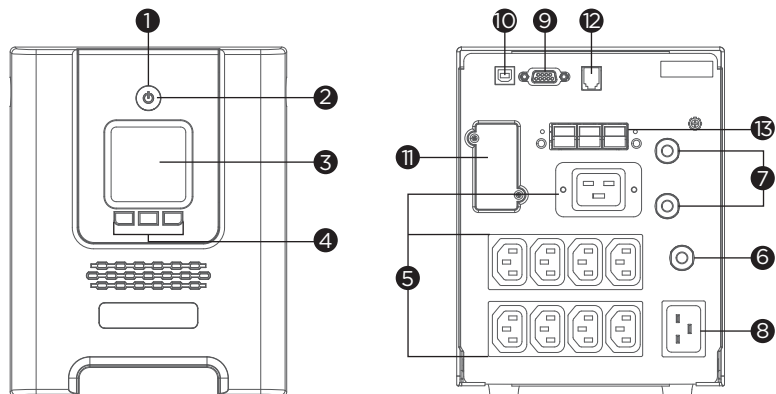

PR2200/3000ELCDSXL



## TECHNICAL SPECIFICATIONS

Model Name	PR2200ELCDSXL	PR3000ELCDSXL
<b>General</b>		
UPS Topology	Line-interactive	Line-interactive
Energy Saving Technology	GreenPower UPS™ Bypass Technology	GreenPower UPS™ Bypass Technology
Active PFC Compatibility	Yes	Yes
<b>Input</b>		
Nominal Input Voltage (Vac)	230	230
Input Voltage Range (Vac)	151 - 301	151 - 301
Input Frequency (Hz)	50 ± 3, 60 ± 3	50 ± 3, 60 ± 3
Input Frequency Detection	Auto-sensing	Auto-sensing
Rated Input Current (A)	16	16
Input Connector Type	IEC C20	IEC C20
<b>Output</b>		
Capacity (VA)	2200	3000
Capacity (Watts)	1980	2700
On Battery Waveform	Pure Sine Wave	Pure Sine Wave
On Battery Voltage(s) (Vac)	230 ± 10%	230 ± 10%
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%	50 ± 1%, 60 ± 1%
Power Factor	0.9	0.9
Automatic Voltage Regulation (AVR)	Double Boost, Single Buck	Double Boost, Single Buck
Overload Protection	Internal Current Limiting, Circuit Breaker	Internal Current Limiting, Circuit Breaker
Outlet(s) - Total	9	9
Outlet Type	IEC C19 x 1, IEC C13 x 8	IEC C19 x 1, IEC C13 x 8
Outlet(s) - Battery & Surge Protected	9	9
Typical Transfer Time (ms)	4	4
<b>Battery</b>		
Runtime at Half Load (min)	9.5	7
Runtime at Full Load (min)	2.5	2
Typical Recharge Time (Hours)	8	8
User-replaceable	Yes	Yes
Hot-swappable	Yes	Yes
Battery Type	Sealed Lead-acid	Sealed Lead-acid
Replacement Battery Pack	RBP0116	RBP0116
RBP Quantity (pcs)	1	1
Extended Battery Module (EBM)	BP48VPT01	BP48VPT01
Max. EBM Quantity (pcs)	1	1
<b>Surge Protection &amp; Filtering</b>		
Surge Suppression (Joules)	405	405
EMI/RFI Filtration	Yes	Yes
<b>Management &amp; Communications</b>		
LCD Panel	Yes	Yes
HID Compliant USB Port(s)	1	1
Serial Port	Combo (RS232 + Dry Contact)	Combo (RS232 + Dry Contact)
Emergency Power Off (EPO) Port	Yes	Yes
Power Management Software	PowerPanel® Business	PowerPanel® Business
SNMP/HTTP Remote Monitoring	Yes - with optional RMCARD205	Yes - with optional RMCARD205
<b>Physical</b>		
Form Factor	Tower	Tower
<b>Physical Size - UPS Module</b>		
Dimensions (WxHxD) (mm.)	170 x 221 x 432	170 x 221 x 432
Weight (kg.)	25.5	26.8
<b>Environmental</b>		
Operating Temperature (°C)	0 - 40	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 95	0 - 95
Online Thermal Dissipation (BTU/hr)	155	200
<b>Certifications</b>		
Certifications*	CE	CE
RoHS	Yes	Yes

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.