

The hot-swappable battery module achieves constant recharge time without resorting to UPS's power

Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. With the built-in charger design, the EBMs can charge directly from utility without resorting to UPS, significantly saving total charging time when charging multiple EBMs. The products also feature hot-swappable battery packs, allowing users to safely remove and replace battery packs without affecting connected loads.


SERIES FEATURES


- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- Built-in charger for Extended Battery Module (EBM)
- Hot-swappable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

- 1 . EBM DC Input Connector
- 2. BM Ports
- 3. BMP Connectors
- 4. DC Breaker

- 5. AC Fast Charge Outlet
- 6. AC Fast Charge Input
- 7. AC Circuit Breaker



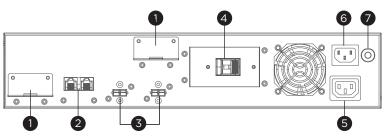

BPE192VL2U01

TECHNICAL SPECIFICATIONS

Model Name	BPE192VL2U01
General	
Nominal Output Voltage (Vdc)	192
Rated Output Current (A)	60
Battery	
Battery Type	Sealed Lead-acid
Built-in Charger	Yes
Typical Recharge Time (Hours)	4
User-replaceable	Qualified Personnel Only
Hot-swappable	Yes
Expansion Ready	Yes
Replacement Battery Pack	RBP0163 x 1, RBP0164 x 1
Replacement Battery Pack Quantity (pcs)	2
Compatible UPS	OL8KRTHD, OL10KRTHD, OL12KRTHD, OL8KERTHD, OL10KERTHD, OL12KERTHD
Physical	
Form Factor	Rackmount, Tower
Physical Size	
Dimensions (WxHxD) (mm.)	433 x 86.5 x 720
Weight (kg.)	46
Installed Rack Height (U)	2
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
Certifications	
Certifications*	FCC Class A, UL1778
RoHS	Yes

^{*}Certifications may vary according to different regions. Visit www.cyberpower.com for more information. #All specifications are subject to change without notice.

