



### **Key Feature**

 Adapts to two-module surface mounting with protective shield.


# **Specification**


Parameters	
Material	SECC
Working temperature	-40° C to +60° C(-40° F to 140° F)
Working humidity	10% to 95%
Dimension	224 × 116.4 × 58 mm (8.82" × 4.58" × 2.28")
Weight	500 g

#### **Available Model**

DS-KABD8003-RS2

### **Dimension**

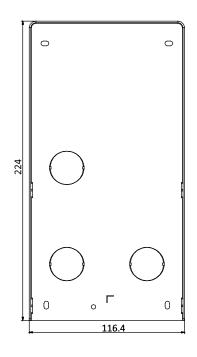



Unit : mm



#### Installation

- 1. Paste the installation Sticker 1 onto the wall. Make sure the sticker is placed leveled via measuring with the gradienter.
  - Chisel 4 holes with drill align to the screw holes on the sticker.
  - The suggested size of hole is 6 (diameter) × 25 (depth) mm.
- Remove the sticker and insert the expansion sleeves into the screw holes. Fix the mounting frame and protective shield onto the wall with 4 expansion bolts.
  - Thread the module-connecting line across the thread hole of the frame


Pass the main unit connecting lines across the thread hole to the upper grid.

Connect the cables and module-connecting line to the corresponding interfaces of the main unit, then place the main unit into the upper grid.

Connect the other end of the module-connecting line to the input interface of the sub module.

Organize the line with cable tie in the package.

- 3. Insert the modules in to the frame after wiring. Main unit must be placed in the top grid.
- 4. Use the hexagon wrench in the package fix the cover onto the frame.

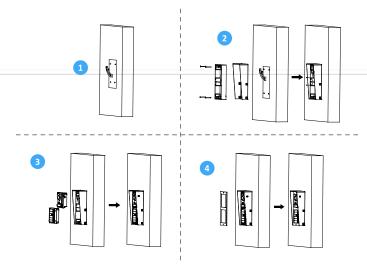



Distributed by

## HIKVISION'

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India 1+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T+39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 səles.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tet: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33[0]1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T+34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T+B2-[0]31-731-8817 sales.korea@hikvision.com

Hikvision Poland T+48-22-460-01-50 Info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com