


# D22x9.1 Series

Applicable camera (model) 1 2/3 1/2 1/3 1/4

22 x

Applicable to 1/2

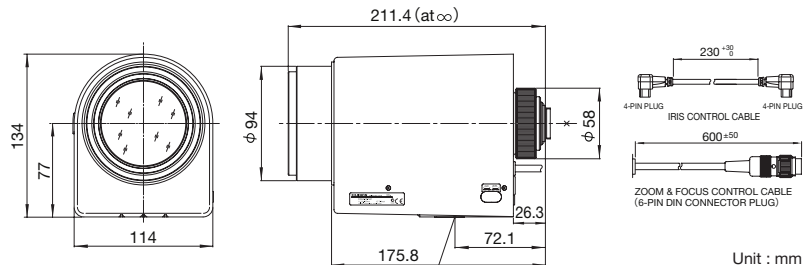

Unit : mm

Day Night

Zoom Motor Drive Wide Angle Telephoto Long Focal Video Auto Iris C Mount Metal Mount Potentiometer ND Filter Large Aperture Ratio RoHS Compliant

**ZOOM MOTOR DRIVE WIDE TELE VIDEO C-mnt METAL PRESET ND F1.2 RoHS**

D22x9.1R2D-V41

TRIPOD ATTACHING SCREW (1/4-20 UNC)

|   |           | Applicable to 1/2                  | Applicable to 1/2            |
|---|-----------|------------------------------------|------------------------------|
|   |           | D22x9.1B-Y41                       | D22x9.1R2D-V41               |
| Focal Length (mm)                           |           | 9.1 - 200(22x)                     |                              |
| Iris Range                                  |           | F1.2 - T1500 (Equivalent to F1500) |                              |
| Operation                                   | Zoom      | Motor Drive                        |                              |
|   | Focus     | Motor Drive                        |                              |
|   | Iris      | Auto(Video Type)                   | Auto(Video Type) or Remote*1 |
| Angle Of View (H x V)                       | 1/2"      | 38° 45' x 29° 33'                  | 38° 45' x 29° 33'            |
|   | WIDE TELE | 1° 50' x 1° 23'                    | 1° 50' x 1° 23'              |
| Focusing Range (From Front Of The Lens) (m) |           | $\infty$ - 3                       |                              |
| ObjectDimensions at M.O.D.(HxV) (mm)        | 1/2"      | 2034 x 1526                        | 2034 x 1526                  |
|   | WIDE TELE | 93 x 69                            | 93 x 69                      |
| Back Focal Distance (in air) (mm)           |           | 23.93                              | 24.05                        |
| Exit Pupil Position (From Image Plane) (mm) |           | -676                               | -672                         |
| Filter Thread (mm)                          |           | M82 x 0.75                         |                              |
| Mass (kg)                                   |           | 2.3                                | 2.5                          |
| Wiring Diagram                              |           | P26                                |                              |

\*1 : For details on the Iris-Remote connection, see the relevant Technical Reference (Page 27).