

## DS-K1T321MWX Face Recognition Terminal



Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- 2.4-inch LCD screen, 2 MP lens
- Multiple authentication methods, including face, card (M1 card), and PIN, etc.
- Max. 500 faces, 3000 cards, and 150,000 events
- Face recognition duration < 0.2 s/User
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the PC web client and mobile web client
- Supports wired network and Wi-Fi (AP mode)
- Supports wiring with secure door control unit or card reader via RS-485





## ▪ Specification

<b>Display</b>	
Screen size	2.4 inch
Type	LCD
<b>Video</b>	
Lens	1
Resolution	2 MP (video stream: 720P)
FOV	HFOV = 25°; VFOV = 43°
<b>Network</b>	
Wired network	Support
Wi-Fi	Support, 2.4 G, 802.11b/g/n
<b>Interface</b>	
Network interface	1 RJ-45, 10/100 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand(Hik 26bit,Hik 34bit)
USB	1
<b>Authentication</b>	
Card type	M1 card
<b>General</b>	
Power supply	12 VDC
Power consumption	≤ 6 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	0% to 90% (No condensing)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese
Keypad	Support
<b>Function</b>	
Face anti-spoofing	Support
Hik-Partner Pro	Support
Face recognition	Support

## ▪ Available Model

DS-K1T321MWX

▪ **Dimension**

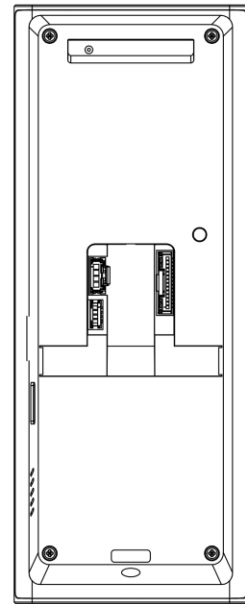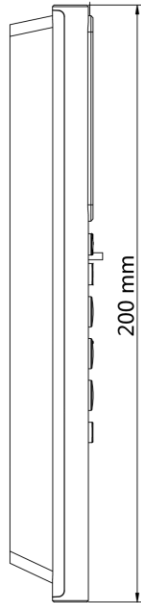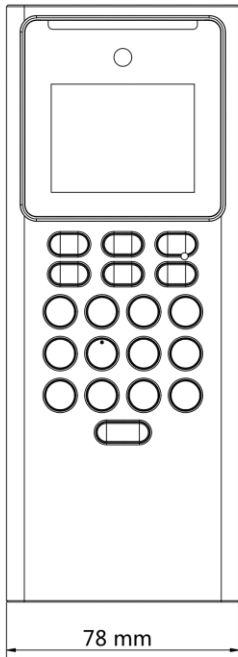

▪ **Accessory**

▪ **Optional**

DS-KAB321-B1 Bracket	DS-KAB321-B2 Bracket
	



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

